




Floating Fenders

PRODUCT BROCHURE

The Smarter Approach

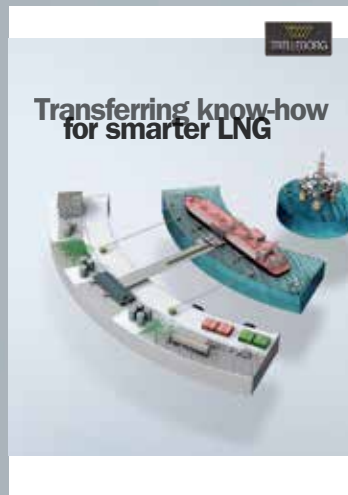

Take The Smarter Approach with Trelleborg Marine Systems

Visit: www.trelleborg.com/marine

Connect: [MarineInsights](#)



Discover: [MarineInsights](#)



Converse: [@MarineInsights](#)



Explore: [MarineInsights](#)



The demanding nature of commercial ports and terminals means you need partnership that provides much more than technically superior products and technologies. You need to work with a partner that combines best practice expertise gained through worldwide experience with a deep understanding of local requirements and regulations. At Trelleborg, we call this the Smarter Approach.

Our Smarter Approach combines global reach with feet-on-the-ground local presence, delivering solutions that continually enhance your operations.

Smart technologies are at the forefront of improving operational efficiencies. Trelleborg's innovative SmartPort offering deploys the latest in marine technology applications to help ports and terminals optimize their operations.

Connect with a partner that combines smart solutions, proven product capability and industry expertise to maintain and enhance port and vessel performance.

Take a Smarter Approach, with Trelleborg Marine Systems.

Floating Fenders

Trelleborg Marine Systems is a world leader in the design and manufacture of advanced marine fender systems.

We provide bespoke solutions for large and complex projects all over the world. Best practice design and quality materials ensure a long, low maintenance service life, no matter how demanding the working and environmental conditions.

All fenders are supplied fully tested and meet PIANC 2002 guidelines. Our pneumatic fenders are also completely ISO17357-1:2014 compliant. Our high performance solutions combine low reaction force and hull pressure with good angular performance and rugged construction.


Trelleborg's fender systems can be integrated with SmartPort. SmartPort by Trelleborg is a technology platform that connects disparate, data-driven assets, giving stakeholders a holistic view of operations to power communication and decision making.

Take a Smarter Approach to fender performance with Trelleborg.

Contents

FLOATING FENDERS

| | |
|-----------------------------------|----|
| A Smarter Approach at every stage | 3 |
| Foam Fenders | 5 |
| SeaBarrier® | 23 |
| HALO Fenders | 27 |
| Hydro Pneumatic Fenders | 29 |
| Low Pressure Pneumatic Fenders | 31 |
| Fender Deployment Systems | 37 |
| Accessories | 39 |

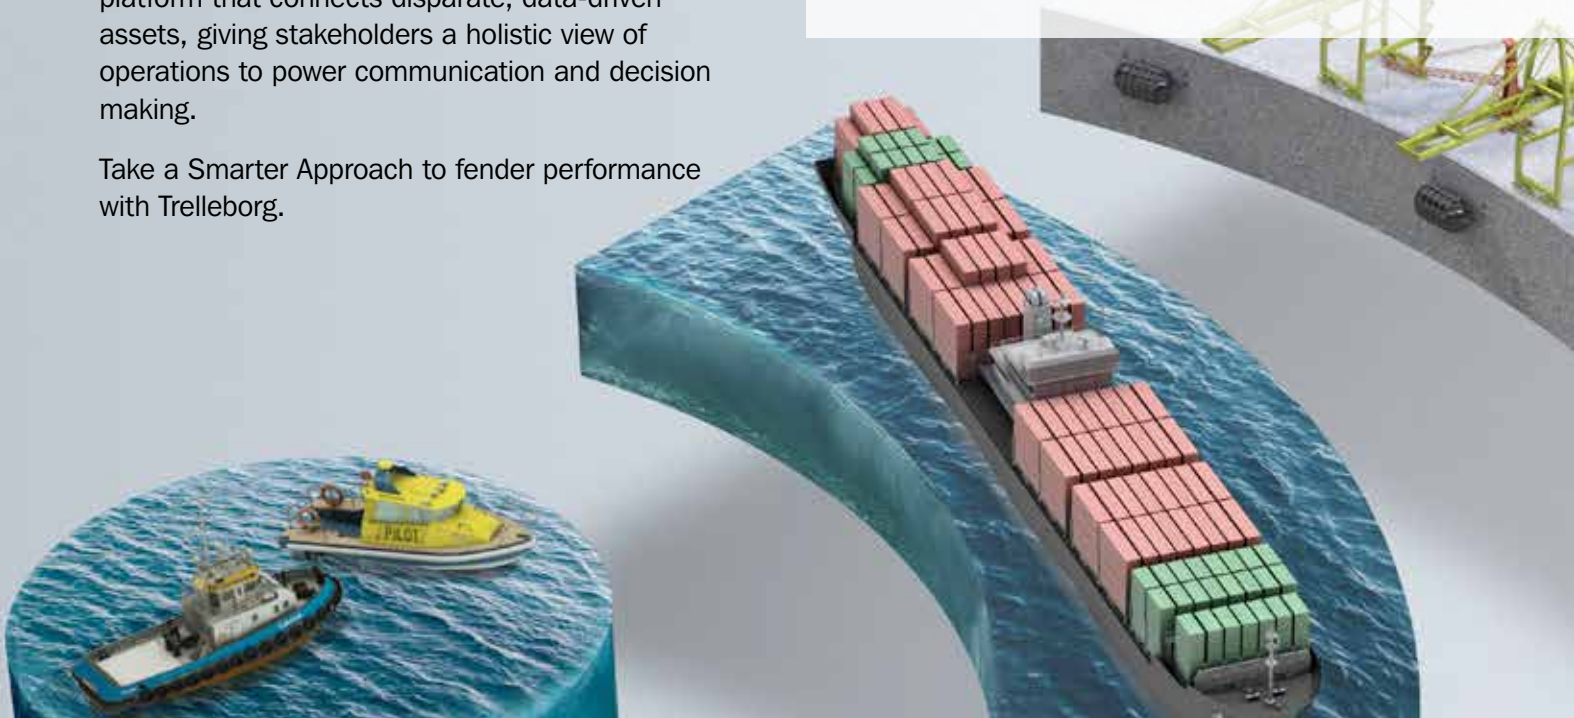

A Smarter Approach at every stage

A smarter approach to...

CONSULTATION

Consultation from the earliest project phase to ensure the optimum fender systems and marine technology solutions are specified, with full technical support from our global offices.



CONCEPTS

Conceptual design in your local office – with full knowledge of local standards and regulations, delivered in your language – for optimized port and vessel solutions.



DESIGN

Concepts are taken to our Engineering Center of Excellence in India where our team generates 3D CAD designs, application-engineering drawings, a bill of materials, finite engineering analysis and calculations for both our fender systems and marine technology solutions.



MANUFACTURE

Our entire product range is manufactured in-house, meaning we have full control over the design and quality of everything we produce. Our strategically located, state-of-the-art facilities ensure our global, industry leading manufacturing capability.



TESTING

Across our entire product range, stringent testing comes as standard at every step in our in-house manufacturing process. We ensure that life-cycle and performance of our entire product range meets your specifications, and more.



INSTALLATION

Dedicated project management, from solution design right the way through to on site installation support. We design products and solutions that always consider ease of installation and future maintenance requirements.



SUPPORT

Local support on a truly global scale, with customer support teams all over the world. And this service doesn't stop after a product is installed. You have our full support throughout the entire lifetime of your project, including customized training programs, maintenance and on-site service and support.



THE FUTURE

Deploying the latest in smart technologies to enable fully-automated, data-driven decision making that optimizes port and terminal efficiency. At Trelleborg, we're constantly evolving to provide the digital infrastructure our industry increasingly needs.



When you choose Trelleborg you ensure your expectations will be met, because we deliver a truly end-to-end service – retaining vigilance and full control at every stage.

Foam Fenders



Trelleborg foam fenders absorb impact while resisting wear and tear in an aggressive environment.

SeaGuard®, SeaCushion® and Donut fenders share a construction technology centered on a closed-cell polyethylene foam core and an outer skin of reinforced polyurethane elastomer. The closed-cell foam structure retains performance even if a fender's skin is punctured. The closed cell internal structure prevents water ingress into the foam.

Even after many years of active service, foam fenders can often be returned to the factory, reskinned and fully refurbished to an almost new condition. Ask your local TMS office for details.

Rental options are available for foam fenders. Installation can be done within days to any location worldwide. Rental is highly cost effective for temporary applications and with Trelleborg you get a fender rental service second to none.

| FENDER | FEATURES | APPLICATION |
|----------------------|--|--|
| *SeaGuard® | <ul style="list-style-type: none"> Fully compliant with US Navy specifications Wide range of standard and custom sizes Low reaction and high energy options Operate floating or suspended No chain/tire net required Non-marking even against white hulls Unsinkable design | <ul style="list-style-type: none"> Cruise ships Container vessels Bulk cargo RoRo and ferries Oil and gas tankers General cargo Navy berths Ship-to-ship transfers |
| SeaCushion® | <ul style="list-style-type: none"> Ultra-tough, unsinkable design Wide range of standard and custom sizes Low reaction and high energy options Low hull pressures Maintains safe stand-off distances Low maintenance Well proven design | <ul style="list-style-type: none"> LNG and oil terminals Ship-to-ship operations Offshore boat landings Shipyards Military applications |
| Donut Fenders | <ul style="list-style-type: none"> Freely rotates around a pile Rises and falls with water level Simple installation Requires minimal maintenance High performance Low hull pressures Will not mark ship hulls | <ul style="list-style-type: none"> Corner protection Turning structures Lead-in jetties Simple breasting dolphins Bridge protection RoRo berths |



* SeaGuard® Fenders are ABS Type approved based on ABS rules and ASTM standard. It is voluntary and denotes excellence in manufacturing quality and performance.










Consistent with its quality and environmental policies, Trelleborg Marine Systems maintains both ISO 14001:2004 (Environmental) and ISO 9001:2008 (Quality) certifications.




TAA Compliant
TAA refers to the Trade Agreements Act (19 U.S.C. & 2501-2581), which is intended to foster fair and open international trade.

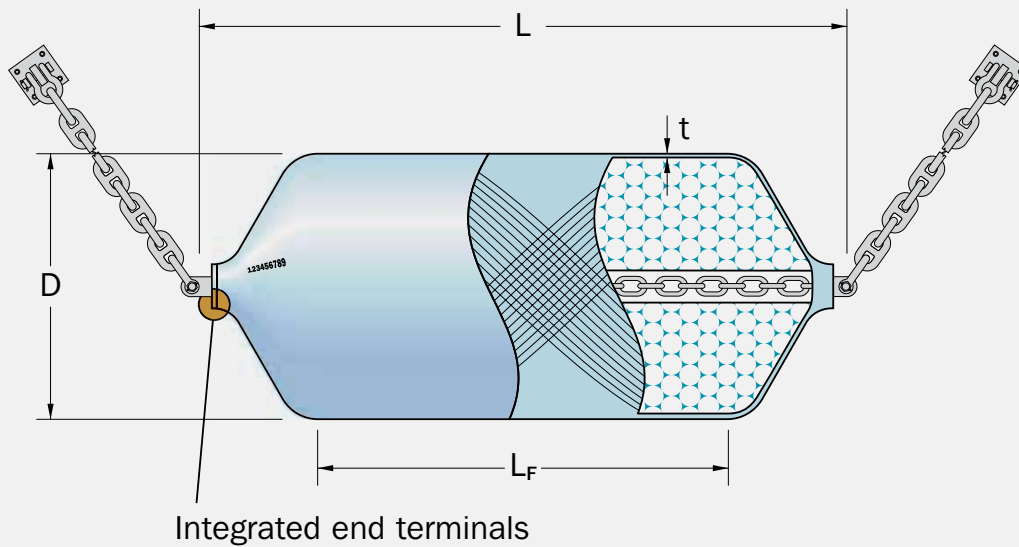Foam Fenders – SeaGuard®




| | | | | | |
|--|------------------------|--|-------------------|--|---------------|
|  | Closed cell foam core |  | Polyurethane skin |  | Fixings |
|  | Filament reinforcement |  | Internal chains |  | Serial number |

Mooring applications

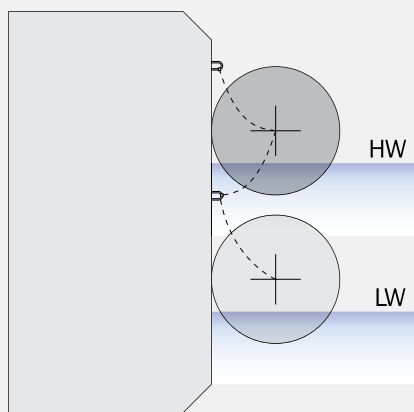




Floating or suspended

Mounting area

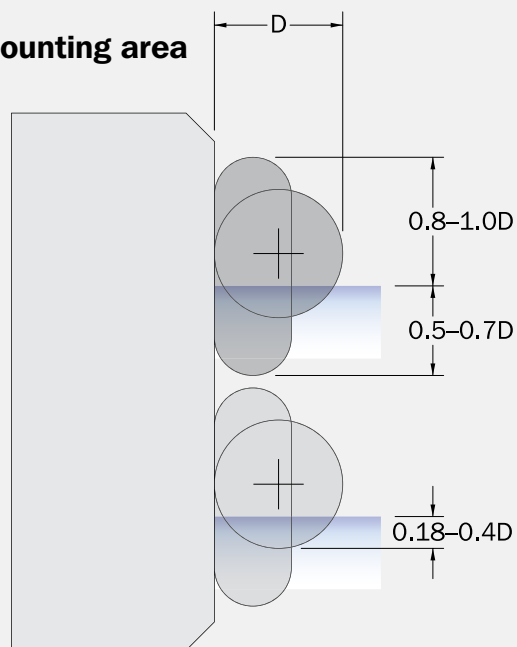

Supporting structures must be large enough to cope with tides and the fender footprint when compressed.

- 1. JAPAN
- 2. JAPAN
- 3. CHINA
- 4. USA
- 5. PUERTO RICO

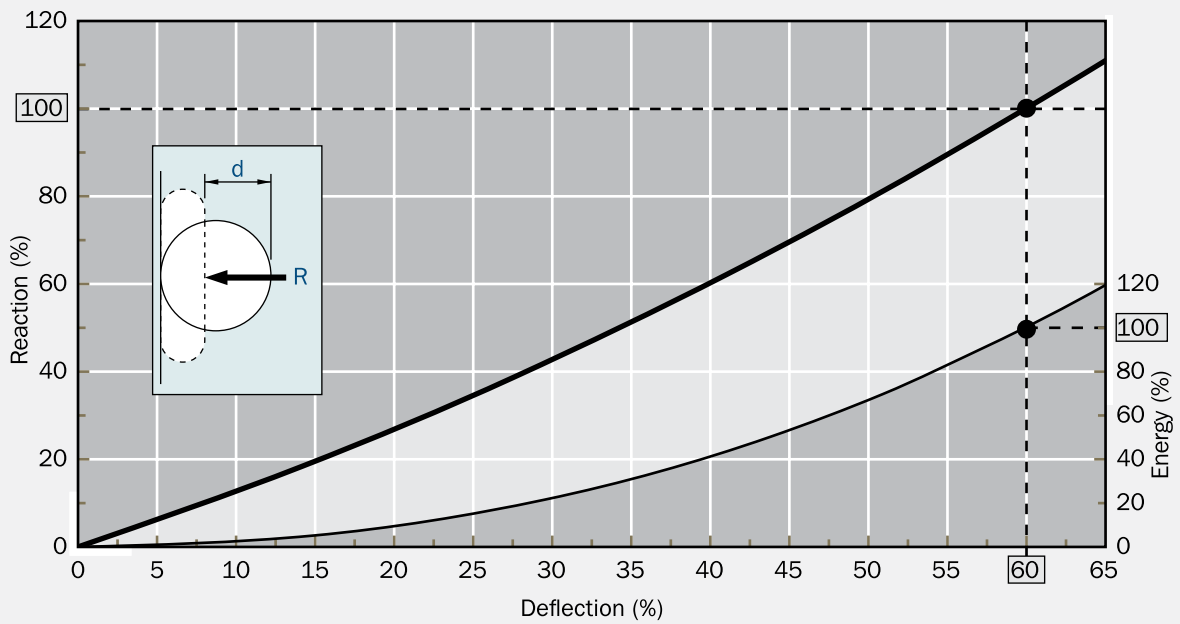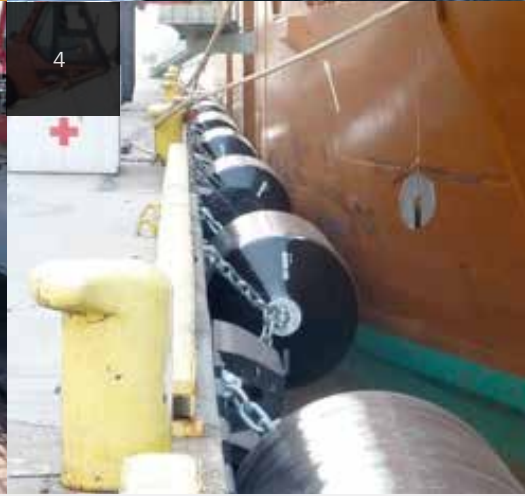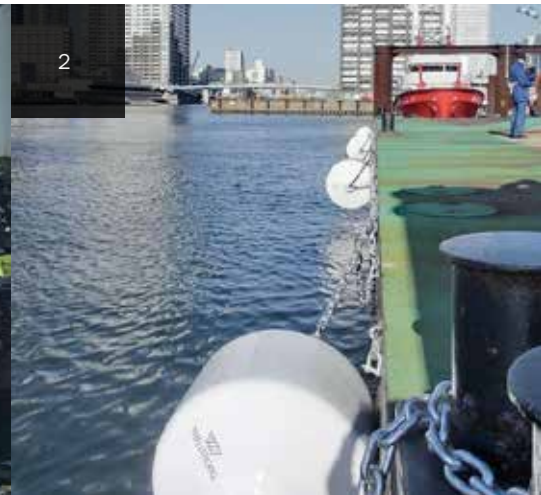

Note: Standard manufacturing and performance tolerance:
 Energy: 100%, Reaction: 100%, Tolerance: ± 10%

Foam Fenders – SeaGuard®

PERFORMANCE AT 60% DEFLECTION (METRIC)

| DIAMETER X LENGTH | | STANDARD CAPACITY | | | |
|-------------------|-------------|-------------------|------------------|--------------------|-------------------|
| (m) | (ft) | ENERGY (kNm) | REACTION (kN) | ENERGY (ft-kip) | REACTION (kip) |
| 0.7 x 1.5 | 2.3 x 4.9 | 26 | 133 | 19 | 30 |
| 1.0 x 1.5 | 3.3 x 4.9 | 47 | 173 | 35 | 39 |
| 1.0 x 2.0 | 3.3 x 6.6 | 68 | 254 | 50 | 57 |
| 1.2 x 2.0 | 3.9 x 6.6 | 91 | 280 | 67 | 63 |
| 1.35 x 2.5 | 4.4 x 8.2 | 152 | 418 | 112 | 94 |
| 1.5 x 3.0 | 5 x 10 | 244 | 596 | 180 | 134 |
| 1.7 x 3.0 | 5.6 x 9.8 | 282 | 618 | 208 | 139 |
| 2.0 x 3.5 | 6.6 x 11.5 | 454 | 845 | 335 | 190 |
| 2.0 x 4.0 | 6.6 x 13.1 | 540 | 1005 | 398 | 226 |
| 2.0 x 4.5 | 6.6 x 14.8 | 624 | 1161 | 460 | 261 |
| 2.2 x 3.5 | 7.2 x 11.5 | 541 | 915 | 399 | 206 |
| 2.2 x 4.0 | 7.2 x 13.1 | 643 | 1088 | 474 | 245 |
| 2.2 x 4.5 | 7.2 x 14.8 | 746 | 1263 | 550 | 284 |
| 2.2 x 5.0 | 7.2 x 16.4 | 847 | 1437 | 625 | 323 |
| 2.2 x 6.0 | 7.2 x 19.7 | 1052 | 1784 | 776 | 401 |
| 3.0 x 4.9 | 10 x 16 | 1464 | 1788 | 1080 | 402 |
| 3.0 x 6.1 | 10 x 20 | 1946 | 2375 | 1435 | 534 |
| 3.3 x 4.5 | 10.8 x 14.8 | 1498 | 1690 | 1105 | 380 |
| 3.3 x 6.5 | 10.8 x 21.3 | 2421 | 2731 | 1786 | 614 |

Energy and reaction provided in the tables are based on Trelleborg’s new testing protocol for foam fenders.

For increased energy use high, extra high or super high capacity foam grades.

| FOAM GRADES | | RATIO | AVERAGE REACTION PRESSURE * | |
|---------------------|-----|-------|-----------------------------|------|
| | | | KPa | KSF |
| Low reaction | LR | 0.6 | <103 | <2.2 |
| Standard | STD | 1.0 | <172 | <3.6 |
| High capacity | HC | 1.3 | <224 | <4.7 |
| Extra high capacity | EHC | 1.9 | <327 | <6.8 |
| Super high capacity | SHC | 2.6 | <447 | <9.4 |

*Reaction pressure varies depending on fender size. Contact Trelleborg for details.

Foam Fenders – SeaGuard®

PERFORMANCE AT 60% DEFLECTION (IMPERIAL)

| DIAMETER X LENGTH | | STANDARD CAPACITY | | | |
|-------------------|-----------|--------------------|-------------------|-----------------|------------------|
| (ft) | (m) | ENERGY (ft-kip) | REACTION (kip) | ENERGY (kNm) | REACTION (kN) |
| 2 x 4 | 0.6 x 1.2 | 11 | 20 | 15 | 89 |
| 2 x 6 | 0.6 x 1.8 | 18 | 33 | 24 | 147 |
| 2 x 8 | 0.6 x 2.4 | 25 | 47 | 34 | 209 |
| 2 x 10 | 0.6 x 3.0 | 32 | 60 | 43 | 267 |
| 3 x 5 | 0.9 x 1.5 | 31 | 38 | 42 | 169 |
| 3 x 6 | 0.9 x 1.8 | 39 | 48 | 53 | 214 |
| 3 x 8 | 0.9 x 2.4 | 55 | 68 | 75 | 302 |
| 3 x 10 | 0.9 x 3.0 | 71 | 88 | 96 | 391 |
| 3 x 12 | 0.9 x 3.7 | 87 | 108 | 118 | 480 |
| 3 x 14 | 0.9 x 4.3 | 103 | 128 | 140 | 569 |
| 4 x 6 | 1.2 x 1.8 | 61 | 57 | 83 | 254 |
| 4 x 8 | 1.2 x 2.4 | 89 | 83 | 121 | 369 |
| 4 x 10 | 1.2 x 3.0 | 118 | 110 | 160 | 489 |
| 4 x 12 | 1.2 x 3.7 | 146 | 136 | 198 | 605 |
| 4 x 16 | 1.2 x 4.9 | 203 | 189 | 275 | 841 |
| 4 x 20 | 1.2 x 6.1 | 260 | 242 | 353 | 1076 |
| 5 x 8 | 1.5 x 2.4 | 136 | 101 | 184 | 449 |
| 5 x 10 | 1.5 x 3.0 | 180 | 134 | 244 | 596 |
| 5 x 12 | 1.5 x 3.7 | 224 | 167 | 304 | 743 |
| 5 x 14 | 1.5 x 4.3 | 269 | 200 | 365 | 890 |
| 5 x 16 | 1.5 x 4.9 | 313 | 233 | 424 | 1036 |
| 5 x 18 | 1.5 x 5.5 | 357 | 266 | 484 | 1183 |
| 6 x 12 | 1.8 x 3.7 | 300 | 186 | 407 | 827 |
| 6 x 16 | 1.8 x 4.9 | 427 | 265 | 579 | 1179 |
| 6 x 18 | 1.8 x 5.5 | 491 | 305 | 665 | 1354 |
| 6 x 20 | 1.8 x 6.1 | 554 | 344 | 751 | 1530 |
| 7 x 14 | 2.1 x 4.3 | 487 | 259 | 660 | 1152 |
| 7 x 16 | 2.1 x 4.9 | 574 | 305 | 778 | 1357 |
| 7 x 18 | 2.1 x 5.5 | 660 | 351 | 895 | 1561 |
| 7 x 20 | 2.1 x 6.1 | 747 | 397 | 1013 | 1766 |
| 8 x 14 | 2.4 x 4.3 | 619 | 288 | 839 | 1281 |
| 8 x 16 | 2.4 x 4.9 | 733 | 341 | 994 | 1517 |
| 8 x 18 | 2.4 x 5.5 | 847 | 394 | 1148 | 1753 |
| 8 x 20 | 2.4 x 6.1 | 961 | 447 | 1303 | 1988 |
| 8 x 22 | 2.4 x 6.7 | 1075 | 500 | 1458 | 2224 |
| 9 x 16 | 2.7 x 4.9 | 889 | 368 | 1205 | 1637 |
| 9 x 18 | 2.7 x 5.5 | 1032 | 427 | 1399 | 1899 |
| 9 x 20 | 2.7 x 6.1 | 1175 | 486 | 1593 | 2162 |
| 9 x 22 | 2.7 x 6.7 | 1318 | 545 | 1787 | 2424 |
| 10 x 16 | 3.0 x 4.9 | 1080 | 402 | 1464 | 1788 |
| 10 x 18 | 3.0 x 5.5 | 1257 | 468 | 1704 | 2082 |
| 10 x 20 | 3.0 x 6.1 | 1435 | 534 | 1946 | 2375 |
| 10 x 22 | 3.0 x 6.7 | 1613 | 600 | 2187 | 2669 |
| 10 x 24 | 3.0 x 7.3 | 1790 | 666 | 2427 | 2963 |
| 11 x 18 | 3.4 x 5.5 | 1482 | 501 | 2009 | 2229 |
| 11 x 20 | 3.4 x 6.1 | 1696 | 573 | 2299 | 2551 |
| 11 x 22 | 3.4 x 6.7 | 1910 | 646 | 2590 | 2874 |
| 12 x 24 | 3.7 x 7.3 | 2595 | 850 | 3518 | 3781 |
| 13 x 26 | 4.0 x 7.9 | 3240 | 985 | 4393 | 4381 |

Energy and reaction provided in the tables are based on Trelleborg's new testing protocol for foam fenders.

Foam Fenders – SeaGuard®

PERFORMANCE AT 60% DEFLECTION (METRIC)

| DIAMETER X LENGTH | | LOW REACTION | | | | HIGH CAPACITY | | | |
|-------------------|-------------|-----------------|------------------|--------------------|-------------------|-----------------|------------------|--------------------|-------------------|
| (m) | (ft) | ENERGY (kNm) | REACTION (kN) | ENERGY (ft-kip) | REACTION (kip) | ENERGY (kNm) | REACTION (kN) | ENERGY (ft-kip) | REACTION (kip) |
| 0.7 x 1.5 | 2.3 x 4.9 | 15 | 80 | 11 | 18 | 33 | 173 | 24 | 39 |
| 1.0 x 1.5 | 3.3 x 4.9 | 28 | 102 | 21 | 23 | 61 | 227 | 45 | 51 |
| 1.0 x 2.0 | 3.3 x 6.6 | 41 | 151 | 30 | 34 | 88 | 329 | 65 | 74 |
| 1.2 x 2.0 | 3.9 x 6.6 | 54 | 169 | 40 | 38 | 118 | 365 | 87 | 82 |
| 1.35 x 2.5 | 4.4 x 8.2 | 91 | 249 | 67 | 56 | 197 | 543 | 145 | 122 |
| 1.5 x 3.0 | 5 x 10 | 146 | 356 | 108 | 80 | 317 | 774 | 234 | 174 |
| 1.7 x 3.0 | 5.6 x 9.8 | 169 | 369 | 125 | 83 | 366 | 801 | 270 | 180 |
| 2.0 x 3.5 | 6.6 x 11.5 | 273 | 507 | 201 | 114 | 591 | 1099 | 436 | 247 |
| 2.0 x 4.0 | 6.6 x 13.1 | 324 | 601 | 239 | 135 | 701 | 1303 | 517 | 293 |
| 2.0 x 4.5 | 6.6 x 14.8 | 374 | 698 | 276 | 157 | 811 | 1508 | 598 | 339 |
| 2.2 x 3.5 | 7.2 x 11.5 | 324 | 549 | 239 | 123 | 703 | 1189 | 518 | 267 |
| 2.2 x 4.0 | 7.2 x 13.1 | 386 | 653 | 285 | 147 | 836 | 1415 | 617 | 318 |
| 2.2 x 4.5 | 7.2 x 14.8 | 447 | 757 | 330 | 170 | 969 | 1640 | 715 | 369 |
| 2.2 x 5.0 | 7.2 x 16.4 | 509 | 861 | 375 | 194 | 1102 | 1865 | 813 | 419 |
| 2.2 x 6.0 | 7.2 x 19.7 | 632 | 1069 | 466 | 240 | 1368 | 2316 | 1009 | 521 |
| 3.0 x 4.9 | 10 x 16 | 879 | 1072 | 648 | 241 | 1904 | 2326 | 1404 | 523 |
| 3.0 x 6.1 | 10 x 20 | 1167 | 1423 | 861 | 320 | 2530 | 3087 | 1866 | 694 |
| 3.3 x 4.5 | 10.8 x 14.8 | 899 | 1014 | 663 | 228 | 1948 | 2193 | 1437 | 493 |
| 3.3 x 6.5 | 10.8 x 21.3 | 1452 | 1637 | 1071 | 368 | 3148 | 3550 | 2322 | 798 |

Energy and reaction provided in the tables are based on Trelleborg’s new testing protocol for foam fenders.

Foam Fenders – SeaGuard®

PERFORMANCE AT 60% DEFLECTION (IMPERIAL)

| DIAMETER X LENGTH | | LOW REACTION | | | | HIGH CAPACITY | | | |
|-------------------|-----------|--------------------|-------------------|-----------------|------------------|--|-------------------|-----------------|------------------|
| (ft) | (m) | ENERGY (ft-kip) | REACTION (kip) | ENERGY (kNm) | REACTION (kN) | ENERGY (ft-kip) | REACTION (kip) | ENERGY (kNm) | REACTION (kN) |
| 2 x 4 | 0.6 x 1.2 | 7 | 12 | 9 | 53 | 14 | 26 | 19 | 116 |
| 2 x 6 | 0.6 x 1.8 | 11 | 20 | 15 | 89 | 23 | 43 | 31 | 191 |
| 2 x 8 | 0.6 x 2.4 | 15 | 28 | 20 | 125 | 33 | 61 | 45 | 271 |
| 2 x 10 | 0.6 x 3.0 | 19 | 36 | 26 | 160 | 42 | 78 | 56 | 347 |
| 3 x 5 | 0.9 x 1.5 | 19 | 23 | 25 | 101 | 40 | 49 | 55 | 220 |
| 3 x 6 | 0.9 x 1.8 | 23 | 29 | 31 | 129 | 51 | 62 | 69 | 276 |
| 3 x 8 | 0.9 x 2.4 | 33 | 41 | 45 | 182 | 72 | 88 | 98 | 391 |
| 3 x 10 | 0.9 x 3.0 | 43 | 53 | 58 | 236 | 92 | 114 | 125 | 507 |
| 3 x 12 | 0.9 x 3.7 | 52 | 65 | 71 | 288 | 113 | 140 | 153 | 625 |
| 3 x 14 | 0.9 x 4.3 | 62 | 77 | 84 | 342 | 134 | 166 | 182 | 740 |
| 4 x 6 | 1.2 x 1.8 | 36 | 34 | 49 | 151 | 79 | 74 | 107 | 329 |
| 4 x 8 | 1.2 x 2.4 | 53 | 50 | 72 | 222 | 116 | 108 | 157 | 480 |
| 4 x 10 | 1.2 x 3.0 | 71 | 66 | 96 | 294 | 153 | 142 | 207 | 632 |
| 4 x 12 | 1.2 x 3.7 | 88 | 82 | 119 | 365 | 190 | 177 | 258 | 787 |
| 4 x 16 | 1.2 x 4.9 | 122 | 113 | 165 | 504 | 264 | 246 | 358 | 1093 |
| 4 x 20 | 1.2 x 6.1 | 156 | 145 | 212 | 646 | 338 | 315 | 458 | 1399 |
| 5 x 8 | 1.5 x 2.4 | 82 | 61 | 111 | 271 | 177 | 131 | 240 | 583 |
| 5 x 10 | 1.5 x 3.0 | 108 | 80 | 146 | 356 | 234 | 174 | 317 | 774 |
| 5 x 12 | 1.5 x 3.7 | 135 | 100 | 183 | 445 | 292 | 217 | 396 | 965 |
| 5 x 14 | 1.5 x 4.3 | 161 | 120 | 218 | 534 | 349 | 260 | 473 | 1157 |
| 5 x 16 | 1.5 x 4.9 | 188 | 140 | 254 | 622 | 407 | 303 | 551 | 1347 |
| 5 x 18 | 1.5 x 5.5 | 214 | 160 | 290 | 710 | 464 | 346 | 629 | 1538 |
| 6 x 12 | 1.8 x 3.7 | 180 | 112 | 244 | 498 | 390 | 242 | 529 | 1076 |
| 6 x 16 | 1.8 x 4.9 | 256 | 159 | 347 | 707 | 555 | 345 | 752 | 1535 |
| 6 x 18 | 1.8 x 5.5 | 294 | 183 | 399 | 813 | 638 | 396 | 865 | 1761 |
| 6 x 20 | 1.8 x 6.1 | 332 | 206 | 450 | 916 | 720 | 447 | 976 | 1988 |
| 7 x 14 | 2.1 x 4.3 | 292 | 155 | 396 | 689 | 633 | 337 | 858 | 1499 |
| 7 x 16 | 2.1 x 4.9 | 344 | 183 | 466 | 814 | 745 | 397 | 1010 | 1766 |
| 7 x 18 | 2.1 x 5.5 | 396 | 211 | 537 | 937 | 858 | 456 | 1163 | 2030 |
| 7 x 20 | 2.1 x 6.1 | 448 | 238 | 607 | 1059 | 971 | 516 | 1317 | 2295 |
| 8 x 14 | 2.4 x 4.3 | 371 | 173 | 503 | 770 | 805 | 374 | 1091 | 1664 |
| 8 x 16 | 2.4 x 4.9 | 440 | 205 | 597 | 912 | 953 | 443 | 1292 | 1971 |
| 8 x 18 | 2.4 x 5.5 | 508 | 236 | 689 | 1052 | 1101 | 512 | 1493 | 2278 |
| 8 x 20 | 2.4 x 6.1 | 577 | 268 | 782 | 1192 | 1249 | 581 | 1693 | 2584 |
| 8 x 22 | 2.4 x 6.7 | 645 | 300 | 875 | 1334 | 1398 | 650 | 1895 | 2891 |
| 9 x 16 | 2.7 x 4.9 | 533 | 221 | 723 | 982 | 1156 | 478 | 1567 | 2128 |
| 9 x 18 | 2.7 x 5.5 | 619 | 256 | 839 | 1139 | 1342 | 555 | 1820 | 2469 |
| 9 x 20 | 2.7 x 6.1 | 705 | 292 | 956 | 1297 | 1528 | 632 | 2071 | 2810 |
| 9 x 22 | 2.7 x 6.7 | 791 | 327 | 1072 | 1455 | 1713 | 709 | 2323 | 3154 |
| 10 x 16 | 3.0 x 4.9 | 648 | 241 | 879 | 1072 | 1404 | 523 | 1904 | 2326 |
| 10 x 18 | 3.0 x 5.5 | 754 | 281 | 1022 | 1250 | 1635 | 608 | 2217 | 2705 |
| 10 x 20 | 3.0 x 6.1 | 861 | 320 | 1167 | 1423 | 1866 | 694 | 2530 | 3087 |
| 10 x 22 | 3.0 x 6.7 | 968 | 360 | 1312 | 1601 | 2096 | 780 | 2842 | 3470 |
| 10 x 24 | 3.0 x 7.3 | 1074 | 400 | 1456 | 1778 | 2327 | 866 | 3155 | 3851 |
| 11 x 18 | 3.4 x 5.5 | 889 | 301 | 1205 | 1339 | 1926 | 651 | 2611 | 2896 |
| 11 x 20 | 3.4 x 6.1 | 1018 | 344 | 1380 | 1530 | 2205 | 745 | 2989 | 3316 |
| 11 x 22 | 3.4 x 6.7 | 1146 | 388 | 1554 | 1726 | 2483 | 840 | 3367 | 3737 |
| 12 x 24 | 3.7 x 7.3 | 1557 | 510 | 2111 | 2269 | 3374 | 1105 | 4575 | 4915 |
| 13 x 26 | 4.0 x 7.9 | 1944 | 591 | 2636 | 2629 | Please consult Trelleborg Marine Systems | | | |

Energy and reaction provided in the tables are based on Trelleborg's new testing protocol for foam fenders.

Foam Fenders – SeaGuard®

PERFORMANCE AT 60% DEFLECTION (METRIC)

| DIAMETER X LENGTH | | EXTRA HIGH CAPACITY | | | | SUPER HIGH CAPACITY | | | |
|-------------------|-------------|---------------------|------------------|--------------------|-------------------|--|------------------|--------------------|-------------------|
| (m) | (ft) | ENERGY (kNm) | REACTION (kN) | ENERGY (ft-kip) | REACTION (kip) | ENERGY (kNm) | REACTION (kN) | ENERGY (ft-kip) | REACTION (kip) |
| 0.7 x 1.5 | 2.3 x 4.9 | 47 | 249 | 35 | 56 | 65 | 343 | 48 | 77 |
| 1.0 x 1.5 | 3.3 x 4.9 | 89 | 329 | 66 | 74 | 122 | 449 | 90 | 101 |
| 1.0 x 2.0 | 3.3 x 6.6 | 129 | 480 | 95 | 108 | 178 | 658 | 131 | 148 |
| 1.2 x 2.0 | 3.9 x 6.6 | 172 | 534 | 127 | 120 | 236 | 734 | 174 | 165 |
| 1.35 x 2.5 | 4.4 x 8.2 | 287 | 792 | 212 | 178 | 393 | 1085 | 290 | 244 |
| 1.5 x 3.0 | 5 x 10 | 464 | 1130 | 342 | 254 | 635 | 1548 | 468 | 348 |
| 1.7 x 3.0 | 5.6 x 9.8 | 536 | 1174 | 395 | 264 | 732 | 1606 | 540 | 361 |
| 2.0 x 3.5 | 6.6 x 11.5 | 864 | 1606 | 637 | 361 | 1182 | 2197 | 872 | 494 |
| 2.0 x 4.0 | 6.6 x 13.1 | 1025 | 1904 | 756 | 428 | 1402 | 2607 | 1034 | 586 |
| 2.0 x 4.5 | 6.6 x 14.8 | 1185 | 2206 | 874 | 496 | 1622 | 3016 | 1196 | 678 |
| 2.2 x 3.5 | 7.2 x 11.5 | 1027 | 1738 | 758 | 391 | 1405 | 2378 | 1037 | 535 |
| 2.2 x 4.0 | 7.2 x 13.1 | 1222 | 2068 | 901 | 465 | 1672 | 2829 | 1233 | 636 |
| 2.2 x 4.5 | 7.2 x 14.8 | 1416 | 2397 | 1045 | 539 | 1938 | 3280 | 1429 | 737 |
| 2.2 x 5.0 | 7.2 x 16.4 | 1611 | 2726 | 1188 | 613 | 2204 | 3730 | 1626 | 839 |
| 2.2 x 6.0 | 7.2 x 19.7 | 2000 | 3385 | 1475 | 761 | 2737 | 4631 | 2019 | 1041 |
| 3.0 x 4.9 | 10 x 16 | 2782 | 3398 | 2052 | 764 | 3807 | 4648 | 2808 | 1045 |
| 3.0 x 6.1 | 10 x 20 | 3697 | 4515 | 2727 | 1015 | 5059 | 6174 | 3731 | 1388 |
| 3.3 x 4.5 | 10.8 x 14.8 | 2847 | 3207 | 2100 | 721 | 3895 | 4390 | 2873 | 987 |
| 3.3 x 6.5 | 10.8 x 21.3 | 4600 | 5187 | 3393 | 1166 | Please consult Trelleborg Marine Systems | | | |

Energy and reaction provided in the tables are based on Trelleborg's new testing protocol for foam fenders.


Foam Fenders – SeaGuard®


PERFORMANCE AT 60% DEFLECTION (IMPERIAL)


| DIAMETER X LENGTH | | EXTRA HIGH CAPACITY | | | | SUPER HIGH CAPACITY | | | | | | | |
|-------------------|-----------|--|-------------------|-----------------|------------------|--|-------------------|-----------------|------------------|--|--|--|--|
| (ft) | (m) | ENERGY (ft-kip) | REACTION (kip) | ENERGY (kNm) | REACTION (kN) | ENERGY (ft-kip) | REACTION (kip) | ENERGY (kNm) | REACTION (kN) | | | | |
| 2 x 4 | 0.6 x 1.2 | 21 | 38 | 28 | 169 | 29 | 52 | 39 | 231 | | | | |
| 2 x 6 | 0.6 x 1.8 | 34 | 63 | 46 | 280 | 47 | 87 | 64 | 387 | | | | |
| 2 x 8 | 0.6 x 2.4 | 48 | 89 | 65 | 396 | 65 | 121 | 88 | 538 | | | | |
| 2 x 10 | 0.6 x 3.0 | 61 | 114 | 82 | 507 | 83 | 156 | 113 | 694 | | | | |
| 3 x 5 | 0.9 x 1.5 | 59 | 72 | 80 | 321 | 81 | 99 | 109 | 439 | | | | |
| 3 x 6 | 0.9 x 1.8 | 74 | 91 | 100 | 405 | 101 | 125 | 137 | 556 | | | | |
| 3 x 8 | 0.9 x 2.4 | 105 | 129 | 142 | 574 | 143 | 177 | 194 | 787 | | | | |
| 3 x 10 | 0.9 x 3.0 | 135 | 167 | 183 | 743 | 185 | 229 | 251 | 1019 | | | | |
| 3 x 12 | 0.9 x 3.7 | 165 | 205 | 224 | 913 | 226 | 281 | 307 | 1249 | | | | |
| 3 x 14 | 0.9 x 4.3 | 196 | 243 | 265 | 1082 | 268 | 333 | 363 | 1480 | | | | |
| 4 x 6 | 1.2 x 1.8 | 115 | 107 | 156 | 476 | 157 | 147 | 213 | 654 | | | | |
| 4 x 8 | 1.2 x 2.4 | 168 | 158 | 228 | 703 | 231 | 216 | 313 | 961 | | | | |
| 4 x 10 | 1.2 x 3.0 | 223 | 208 | 302 | 925 | 306 | 285 | 415 | 1268 | | | | |
| 4 x 12 | 1.2 x 3.7 | 277 | 258 | 376 | 1148 | 380 | 354 | 515 | 1575 | | | | |
| 4 x 16 | 1.2 x 4.9 | 386 | 359 | 523 | 1597 | 528 | 491 | 716 | 2186 | | | | |
| 4 x 20 | 1.2 x 6.1 | 494 | 460 | 670 | 2045 | 676 | 629 | 917 | 2799 | | | | |
| 5 x 8 | 1.5 x 2.4 | 258 | 192 | 350 | 854 | 353 | 263 | 479 | 1170 | | | | |
| 5 x 10 | 1.5 x 3.0 | 342 | 254 | 464 | 1130 | 468 | 348 | 635 | 1548 | | | | |
| 5 x 12 | 1.5 x 3.7 | 426 | 317 | 578 | 1410 | 583 | 434 | 790 | 1931 | | | | |
| 5 x 14 | 1.5 x 4.3 | 510 | 380 | 691 | 1690 | 698 | 520 | 946 | 2313 | | | | |
| 5 x 16 | 1.5 x 4.9 | 594 | 443 | 806 | 1969 | 813 | 606 | 1103 | 2695 | | | | |
| 5 x 18 | 1.5 x 5.5 | 678 | 505 | 920 | 2248 | 928 | 692 | 1258 | 3076 | | | | |
| 6 x 12 | 1.8 x 3.7 | 570 | 354 | 773 | 1575 | 780 | 484 | 1058 | 2153 | | | | |
| 6 x 16 | 1.8 x 4.9 | 811 | 504 | 1100 | 2242 | 1110 | 689 | 1505 | 3065 | | | | |
| 6 x 18 | 1.8 x 5.5 | 932 | 579 | 1264 | 2574 | 1275 | 792 | 1729 | 3522 | | | | |
| 6 x 20 | 1.8 x 6.1 | 1053 | 654 | 1428 | 2909 | 1440 | 894 | 1952 | 3977 | | | | |
| 7 x 14 | 2.1 x 4.3 | 925 | 492 | 1254 | 2189 | 1266 | 673 | 1716 | 2994 | | | | |
| 7 x 16 | 2.1 x 4.9 | 1090 | 580 | 1478 | 2580 | 1491 | 793 | 2022 | 3527 | | | | |
| 7 x 18 | 2.1 x 5.5 | 1254 | 667 | 1700 | 2967 | 1716 | 913 | 2327 | 4059 | | | | |
| 7 x 20 | 2.1 x 6.1 | 1418 | 754 | 1923 | 3354 | 1941 | 1032 | 2632 | 4591 | | | | |
| 8 x 14 | 2.4 x 4.3 | 1176 | 547 | 1594 | 2433 | 1609 | 749 | 2182 | 3332 | | | | |
| 8 x 16 | 2.4 x 4.9 | 1393 | 648 | 1889 | 2882 | 1906 | 887 | 2584 | 3946 | | | | |
| 8 x 18 | 2.4 x 5.5 | 1609 | 749 | 2182 | 3330 | 2202 | 1024 | 2986 | 4557 | | | | |
| 8 x 20 | 2.4 x 6.1 | 1826 | 849 | 2476 | 3777 | 2499 | 1162 | 3388 | 5169 | | | | |
| 8 x 22 | 2.4 x 6.7 | 2043 | 950 | 2769 | 4226 | 2795 | 1300 | 3790 | 5783 | | | | |
| 9 x 16 | 2.7 x 4.9 | 1689 | 699 | 2290 | 3110 | 2311 | 957 | 3134 | 4256 | | | | |
| 9 x 18 | 2.7 x 5.5 | 1960 | 811 | 2657 | 3608 | 2683 | 1110 | 3638 | 4938 | | | | |
| 9 x 20 | 2.7 x 6.1 | 2233 | 923 | 3027 | 4107 | 3055 | 1264 | 4142 | 5621 | | | | |
| 9 x 22 | 2.7 x 6.7 | 2504 | 1036 | 3395 | 4608 | 3427 | 1417 | 4646 | 6303 | | | | |
| 10 x 16 | 3.0 x 4.9 | 2052 | 764 | 2782 | 3398 | 2808 | 1045 | 3807 | 4648 | | | | |
| 10 x 18 | 3.0 x 5.5 | 2389 | 889 | 3239 | 3954 | 3269 | 1217 | 4432 | 5413 | | | | |
| 10 x 20 | 3.0 x 6.1 | 2727 | 1015 | 3697 | 4515 | 3731 | 1388 | 5059 | 6174 | | | | |
| 10 x 22 | 3.0 x 6.7 | 3064 | 1140 | 4154 | 5071 | Please consult Trelleborg Marine Systems | | | | | | | |
| 10 x 24 | 3.0 x 7.3 | 3401 | 1265 | 4612 | 5629 | Please consult Trelleborg Marine Systems | | | | | | | |
| 11 x 18 | 3.4 x 5.5 | 2815 | 952 | 3817 | 4235 | 3852 | 1302 | 5223 | 5792 | | | | |
| 11 x 20 | 3.4 x 6.1 | 3222 | 1090 | 4368 | 4846 | Please consult Trelleborg Marine Systems | | | | | | | |
| 11 x 22 | 3.4 x 6.7 | 3629 | 1227 | 4920 | 5458 | Please consult Trelleborg Marine Systems | | | | | | | |
| 12 x 24 | 3.7 x 7.3 | Please consult Trelleborg Marine Systems | | | | | | | | | | | |
| 13 x 26 | 4.0 x 7.9 | Please consult Trelleborg Marine Systems | | | | | | | | | | | |


Energy and reaction provided in the tables are based on Trelleborg's new testing protocol for foam fenders.


Foam Fenders – SeaCushion®

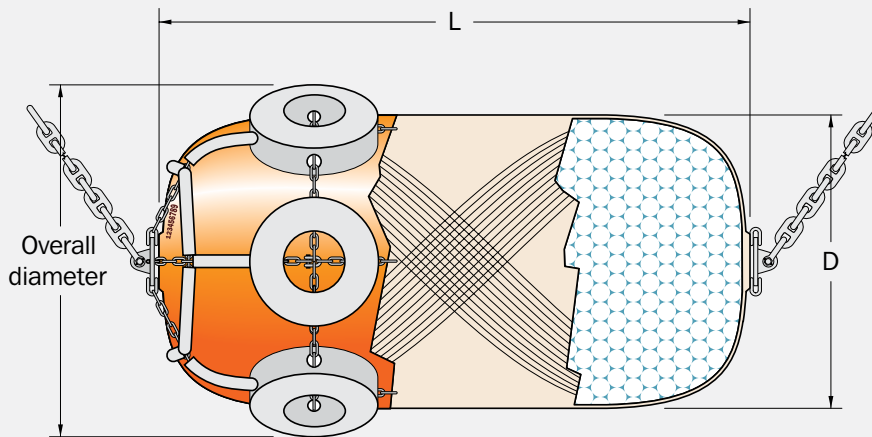



- 

Unsinkable foam core
- 



Tough polyurethane skin
- 

Various mooring options
- 



Filament reinforcement matrix
- 

Chain-tyre net
- 





Unique serial number

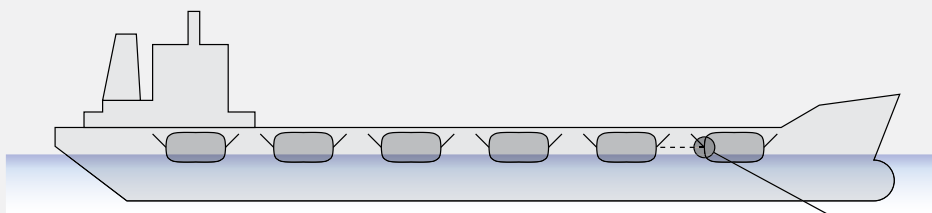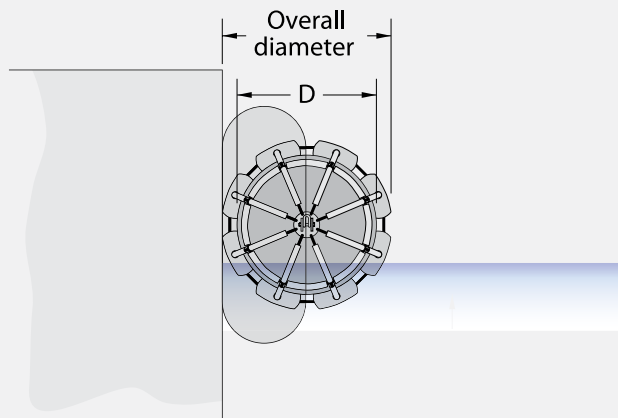

Fender-to-fender mooring and other variations are also possible

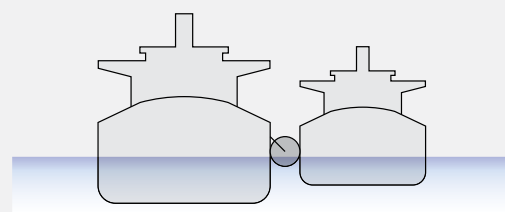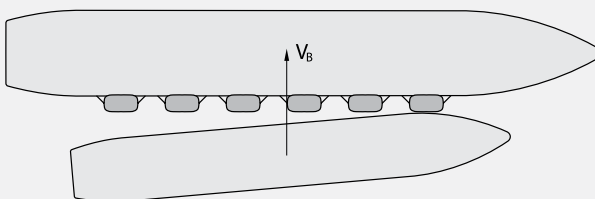

- 1. GERMANY
- 2. NETHERLANDS
- 3. USA
- 4. USA
- 5. USA

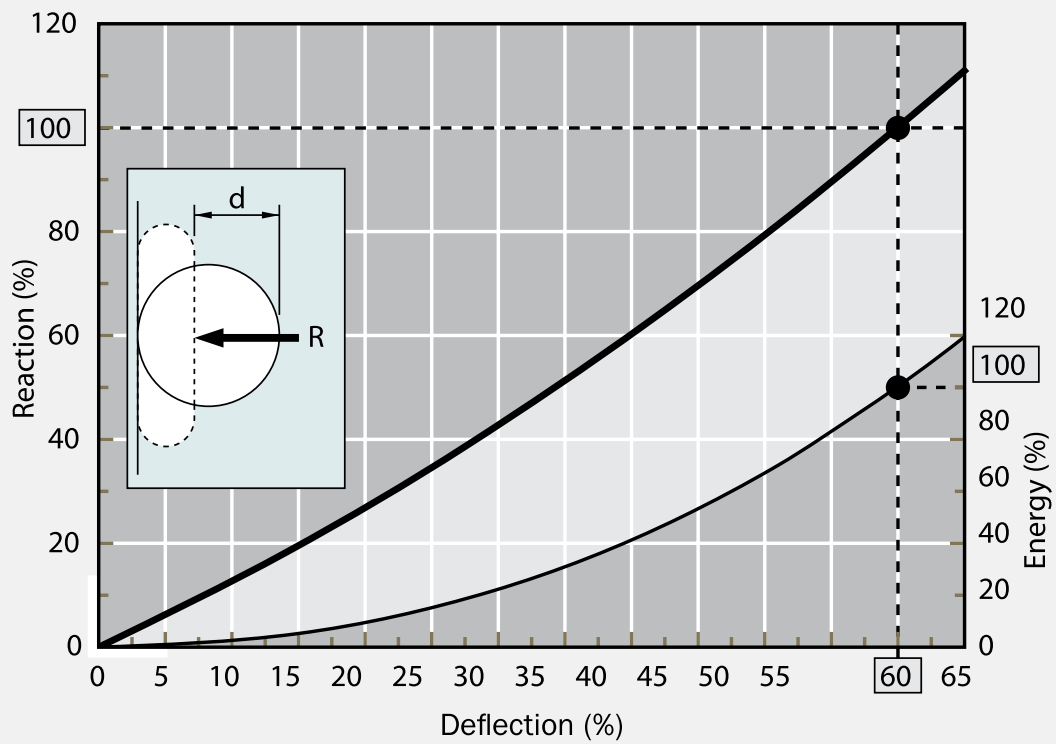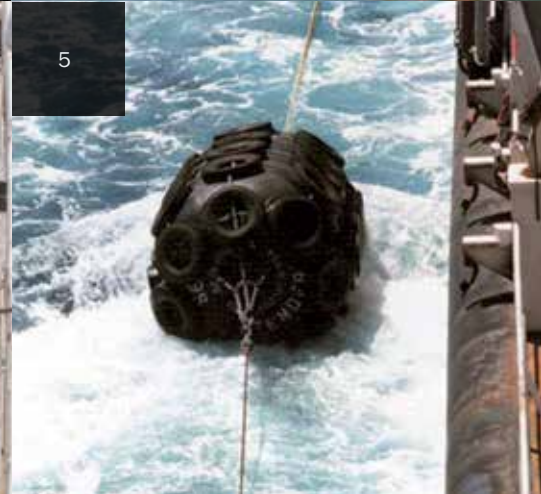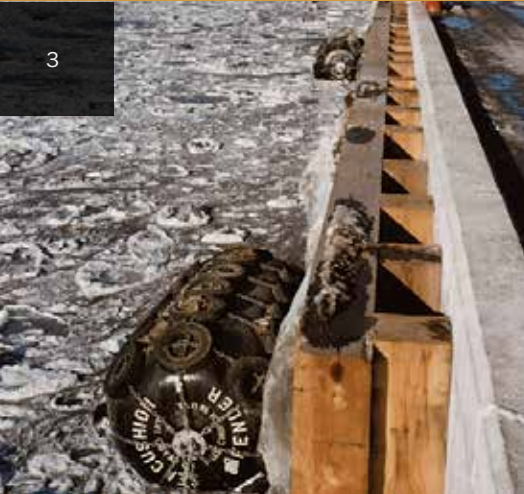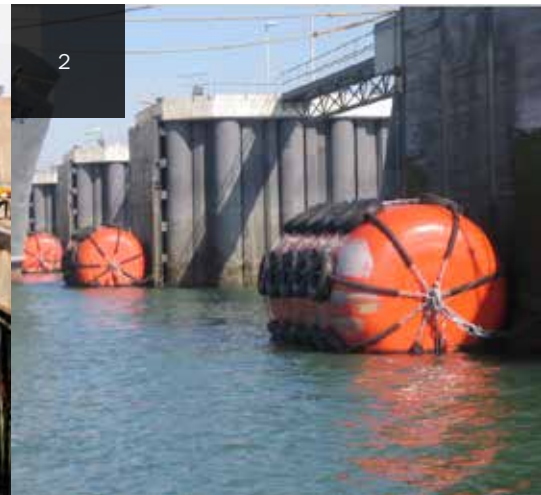

Note: Standard manufacturing and performance tolerance:
 Energy: 100%, Reaction: 100%, Tolerance: ± 10%

Foam Fenders – SeaCushion®

PERFORMANCE AT 60% DEFLECTION, STANDARD CAPACITY

METRIC

| DIAMETER X LENGTH | | OVERALL DIAMETER | | STANDARD CAPACITY | | | |
|-------------------|-------------|------------------|------|--------------------|-------------------|-----------------|-------------------|
| (ft) | (m) | (ft) | (m) | ENERGY (ft-kip) | REACTION (kip) | ENERGY (kNm) | REACTION (kNm) |
| 1.0 x 2.0 | 3.3 x 6.6 | 1.5 | 4.9 | 64 | 294 | 47 | 66 |
| 1.2 x 2.0 | 3.9 x 6.6 | 1.7 | 5.6 | 88 | 338 | 65 | 76 |
| 1.35 x 2.5 | 4.4 x 8.2 | 1.9 | 6.1 | 142 | 485 | 105 | 109 |
| 1.5x 3.0 | 4.9 x 9.8 | 2.0 | 6.6 | 213 | 654 | 157 | 147 |
| 1.7x 3.0 | 5.6 x 9.8 | 2.2 | 7.2 | 264 | 721 | 195 | 162 |
| 2.0 x 3.5 | 6.6 x 11.5 | 2.5 | 8.2 | 424 | 979 | 313 | 220 |
| 2.0 x 4.0 | 6.6 x 13.1 | 2.5 | 8.2 | 498 | 1152 | 367 | 259 |
| 2.2 x 4.5 | 7.2 x 14.8 | 2.7 | 8.9 | 679 | 1423 | 501 | 320 |
| 2.5 x 4.0 | 8.2 x 13.1 | 3.0 | 9.9 | 735 | 1357 | 542 | 305 |
| 2.5 x 5.5 | 8.2 x 18.0 | 3.0 | 9.9 | 1079 | 1993 | 796 | 448 |
| 3.0 x 6.0 | 9.8 x 19.7 | 3.5 | 11.5 | 1655 | 2544 | 1221 | 572 |
| 3.3 x 4.5 | 10.8 x 14.8 | 3.8 | 12.5 | 1367 | 1908 | 1008 | 429 |
| 3.3 x 6.5 | 10.8 x 21.3 | 3.8 | 12.5 | 2154 | 3011 | 1589 | 677 |

IMPERIAL

| DIAMETER X LENGTH | | OVERALL DIAMETER | | STANDARD CAPACITY | | | |
|-------------------|-----------|------------------|-----|--------------------|-------------------|-----------------|-------------------|
| (ft) | (m) | (ft) | (m) | ENERGY (ft-kip) | REACTION (kip) | ENERGY (kNm) | REACTION (kNm) |
| 3 x 6 | 0.9 x 1.8 | 4.7 | 1.4 | 36 | 56 | 49 | 249 |
| 4 x 8 | 1.2 x 2.4 | 5.7 | 1.7 | 85 | 98 | 115 | 436 |
| 5 x 10 | 1.5 x 3.0 | 6.7 | 2.0 | 164 | 152 | 222 | 676 |
| 6 x 12 | 1.8 x 3.7 | 7.7 | 2.3 | 282 | 217 | 382 | 965 |
| 7 x 14 | 2.1 x 4.3 | 8.7 | 2.6 | 445 | 294 | 603 | 1308 |
| 8 x 12 | 2.4 x 3.7 | 9.7 | 2.9 | 465 | 268 | 630 | 1192 |
| 8 x 16 | 2.4 x 4.9 | 9.7 | 3.3 | 661 | 381 | 896 | 1695 |
| 9 x 18 | 2.7 x 5.5 | 10.7 | 3.3 | 937 | 480 | 1270 | 2135 |
| 10 x 16 | 3.0 x 4.9 | 11.7 | 3.6 | 976 | 450 | 1323 | 2002 |
| 10 x 20 | 3.0 x 6.1 | 11.7 | 3.6 | 1280 | 590 | 1735 | 2624 |
| 11 x 22 | 3.4 x 6.7 | 12.7 | 3.9 | 1697 | 712 | 2301 | 3167 |

Energy and reaction provided in the tables are based on Trelleborg's new testing protocol for foam fenders.

Foam Fenders – SeaCushion®

PERFORMANCE AT 60% DEFLECTION, HIGH CAPACITY

METRIC

| DIAMETER X LENGTH | | OVERALL DIAMETER | | HIGH CAPACITY | | | |
|-------------------|-------------|------------------|------|---------------|----------------|-----------------|----------------|
| (m) | (ft) | (m) | (ft) | ENERGY (kNm) | REACTION (kNm) | ENERGY (ft-kip) | REACTION (kip) |
| 1.0 x 2.0 | 3.3 x 6.6 | 1.5 | 4.9 | 93 | 416 | 68 | 94 |
| 1.2 x 2.0 | 3.9 x 6.6 | 1.7 | 5.6 | 127 | 478 | 94 | 107 |
| 1.35 x 2.5 | 4.4 x 8.2 | 1.9 | 6.1 | 205 | 684 | 152 | 154 |
| 1.5x 3.0 | 4.9 x 9.8 | 2.0 | 6.6 | 308 | 922 | 227 | 207 |
| 1.7x 3.0 | 5.6 x 9.8 | 2.2 | 7.2 | 384 | 1013 | 283 | 228 |
| 2.0 x 3.5 | 6.6 x 11.5 | 2.5 | 8.2 | 614 | 1379 | 453 | 310 |
| 2.0 x 4.0 | 6.6 x 13.1 | 2.5 | 8.2 | 721 | 1619 | 532 | 364 |
| 2.2 x 4.5 | 7.2 x 14.8 | 2.7 | 8.9 | 981 | 2003 | 724 | 450 |
| 2.5 x 4.0 | 8.2 x 13.1 | 3.0 | 9.9 | 1065 | 1911 | 786 | 430 |
| 2.5 x 5.5 | 8.2 x 18.0 | 3.0 | 9.9 | 1559 | 2797 | 1150 | 629 |
| 3.0 x 6.0 | 9.8 x 19.7 | 3.5 | 11.5 | 2397 | 3581 | 1768 | 805 |
| 3.3 x 4.5 | 10.8 x 14.8 | 3.8 | 12.5 | 1978 | 2686 | 1459 | 604 |
| 3.3 x 6.5 | 10.8 x 21.3 | 3.8 | 12.5 | 3122 | 4239 | 2303 | 953 |

IMPERIAL

| DIAMETER X LENGTH | | OVERALL DIAMETER | | HIGH CAPACITY | | | |
|-------------------|-----------|------------------|-----|-----------------|----------------|--------------|----------------|
| (ft) | (m) | (ft) | (m) | ENERGY (ft-kip) | REACTION (kip) | ENERGY (kNm) | REACTION (kNm) |
| 3 x 6 | 0.9 x 1.8 | 4.7 | 1.4 | 52 | 79 | 71 | 350 |
| 4 x 8 | 1.2 x 2.4 | 5.7 | 1.7 | 123 | 138 | 167 | 614 |
| 5 x 10 | 1.5 x 3.0 | 6.7 | 2.0 | 238 | 214 | 323 | 951 |
| 6 x 12 | 1.8 x 3.7 | 7.7 | 2.3 | 408 | 306 | 554 | 1359 |
| 7 x 14 | 2.1 x 4.3 | 8.7 | 2.6 | 645 | 413 | 874 | 1838 |
| 8 x 12 | 2.4 x 3.7 | 9.7 | 2.9 | 673 | 378 | 913 | 1679 |
| 8 x 16 | 2.4 x 4.9 | 9.7 | 3.3 | 958 | 537 | 1298 | 2388 |
| 9 x 18 | 2.7 x 5.5 | 10.7 | 3.3 | 1357 | 676 | 1840 | 3007 |
| 10 x 16 | 3.0 x 4.9 | 11.7 | 3.6 | 1414 | 634 | 1917 | 2818 |
| 10 x 20 | 3.0 x 6.1 | 11.7 | 3.6 | 1854 | 831 | 2514 | 3696 |
| 11 x 22 | 3.4 x 6.7 | 12.7 | 3.9 | 2459 | 1001 | 3333 | 4454 |

Small standard duty fenders


PERFORMANCE AT 60% DEFLECTION

| DIAMETER X LENGTH | | STANDARD CAPACITY | | | |
|-------------------|-------------|-------------------|----------------|-----------------|----------------|
| (in) | (mm) | ENERGY (kNm) | REACTION (kNm) | ENERGY (ft-kip) | REACTION (kip) |
| 16 x 36 | 400 x 900 | 4.2 | 48.0 | 3.1 | 10.8 |
| 24 x 36 | 600 x 900 | 8.4 | 63.6 | 6.2 | 14.3 |
| 24 x 48 | 600 x 1200 | 12.7 | 97.0 | 9.4 | 21.8 |
| 32 x 50 | 800 x 1250 | 22.1 | 125.9 | 16.3 | 28.3 |
| 32 x 60 | 800 x 1500 | 28.5 | 162.4 | 21.0 | 36.5 |
| 36 x 60 | 900 x 1500 | 34.8 | 176.6 | 25.7 | 39.7 |
| 36 x 72 | 900 x 1830 | 44.6 | 226.0 | 32.9 | 50.8 |
| 40 x 60 | 1000 x 1500 | 41.6 | 189.9 | 30.7 | 42.7 |

Other sizes, material grades and performance available upon request. Please contact Trelleborg Marine Systems' local offices.


Energy and reaction provided in the tables are based on Trelleborg's new testing protocol for foam fenders.

Foam Fenders – Donut Fenders

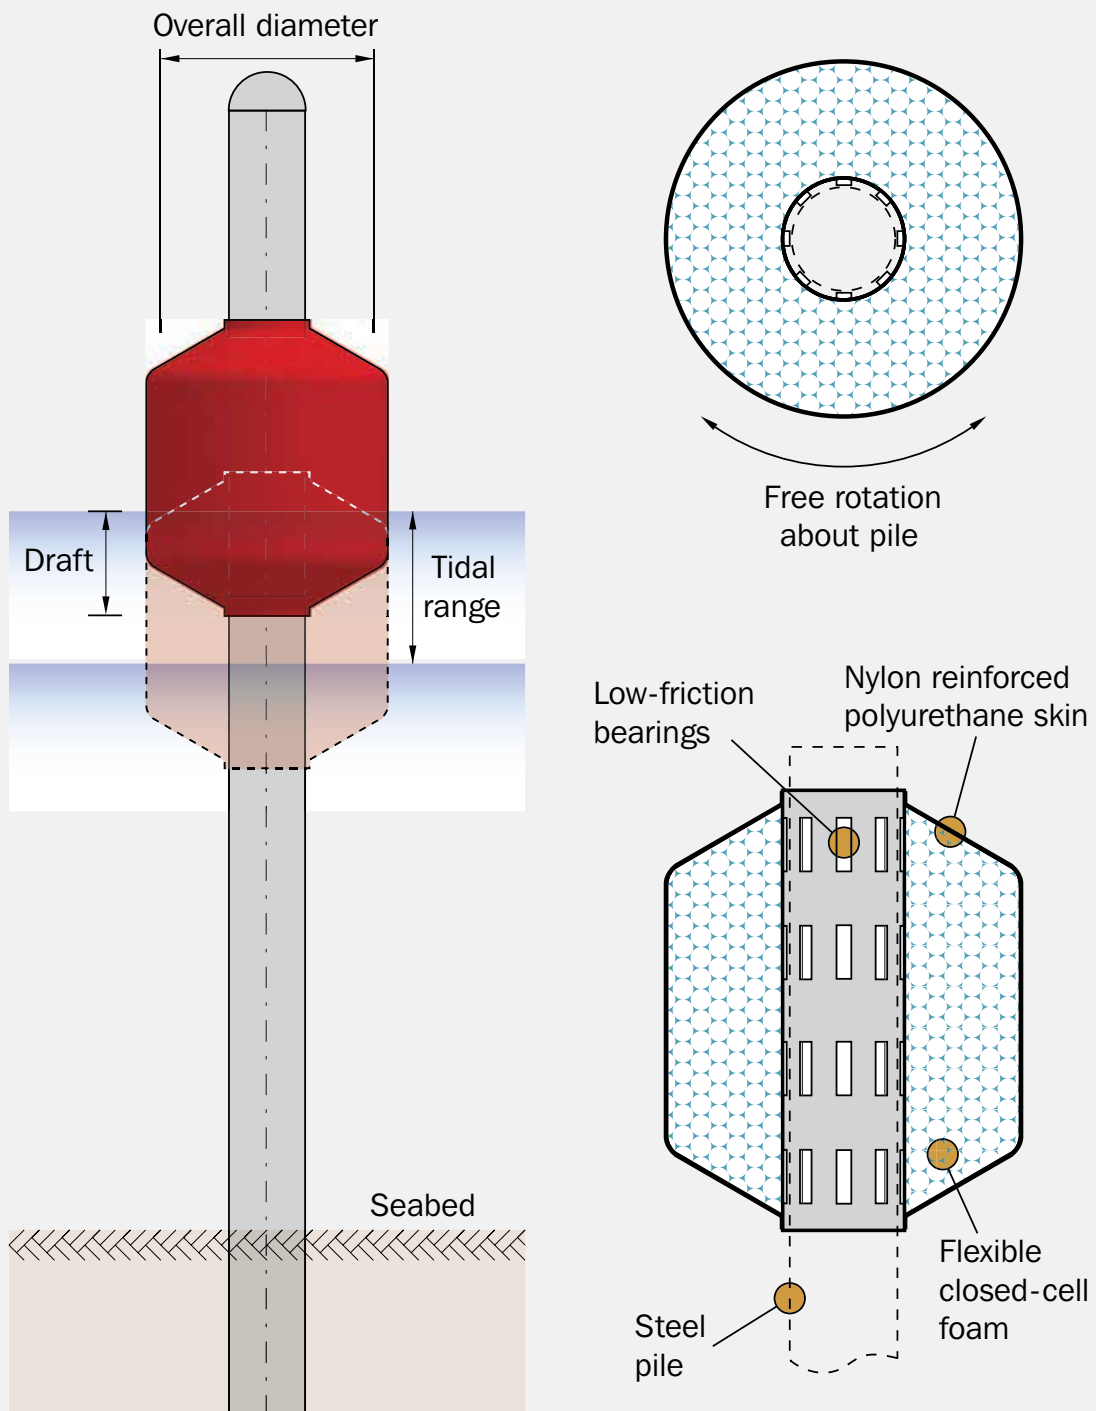


Foam Fenders – Donut Fenders


APPLICATIONS

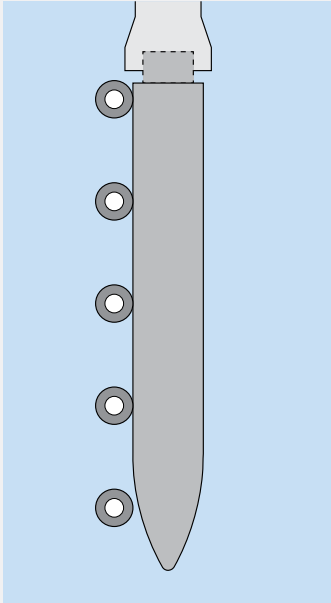

Breasting dolphins

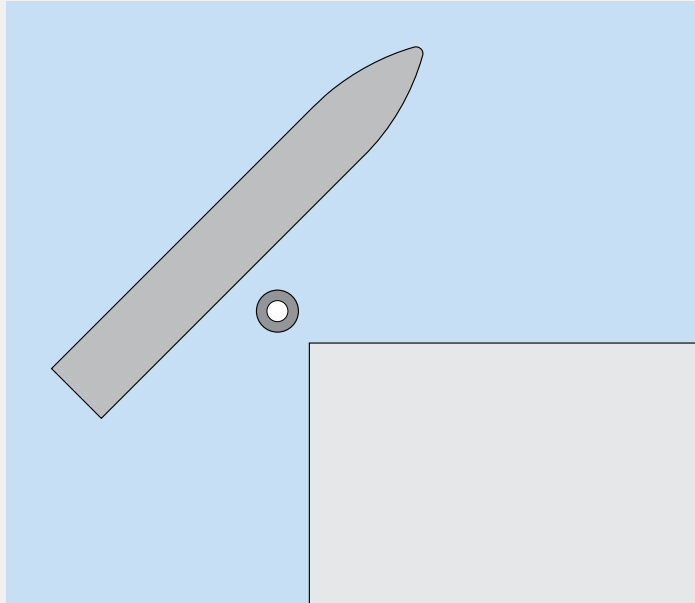

Corner protection

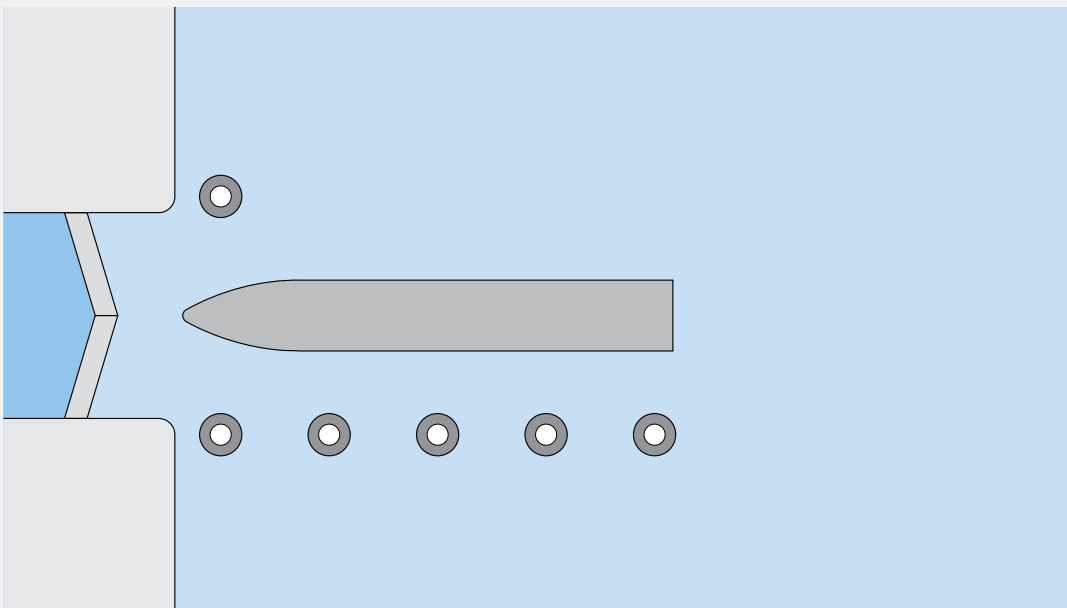


Guiding structures

Foam Fenders – Donut Fenders

PERFORMANCE AT 60% DEFLECTION, STANDARD GRADE

| DONUT SIZE D | | MAXIMUM PILE ØP | | ENERGY* | REACTION* | ENERGY† | REACTION† |
|--------------|------|-----------------|-----|---------|-----------|---------|-----------|
| mm | ft | mm | ft | kNm | kN | ft-kip | kip |
| 1270 | 4.2 | 610 | 2.0 | 7.2 | 116 | 1.6 | 7.9 |
| 1450 | 4.8 | 710 | 2.3 | 9.2 | 131 | 2.1 | 9.0 |
| 1520 | 5.0 | 762 | 2.5 | 10.5 | 140 | 2.4 | 9.6 |
| 1780 | 5.8 | 914 | 3.0 | 14.1 | 162 | 3.2 | 11.1 |
| 1910 | 6.3 | 995 | 3.3 | 16.4 | 175 | 3.7 | 12.0 |
| 2030 | 6.7 | 1067 | 3.5 | 18.6 | 186 | 4.2 | 12.8 |
| 2210 | 7.3 | 1185 | 3.9 | 22.3 | 204 | 5.0 | 14.0 |
| 2290 | 7.5 | 1219 | 4.0 | 23.6 | 210 | 5.3 | 14.4 |
| 2490 | 8.2 | 1345 | 4.4 | 28.0 | 229 | 6.3 | 15.7 |
| 2540 | 8.3 | 1372 | 4.5 | 29.3 | 234 | 6.6 | 16.0 |
| 2790 | 9.2 | 1524 | 5.0 | 35.3 | 256 | 7.9 | 17.6 |
| 2970 | 9.7 | 1636 | 5.4 | 40.1 | 273 | 9.0 | 18.7 |
| 3050 | 10.0 | 1676 | 5.5 | 42.1 | 280 | 9.5 | 19.2 |
| 3300 | 10.8 | 1829 | 6.0 | 49.5 | 304 | 11.1 | 20.8 |
| 3450 | 11.3 | 1933 | 6.3 | 54.6 | 319 | 12.3 | 21.9 |
| 3530 | 11.6 | 1981 | 6.5 | 57.2 | 327 | 12.9 | 22.4 |
| 3810 | 12.5 | 2134 | 7.0 | 65.9 | 350 | 14.8 | 24.0 |
| 3960 | 13.0 | 2241 | 7.4 | 72.1 | 366 | 16.2 | 25.1 |
| 4060 | 13.3 | 2286 | 7.5 | 75.1 | 374 | 16.9 | 25.6 |
| 4220 | 13.8 | 2388 | 7.8 | 81.3 | 389 | 18.3 | 26.7 |

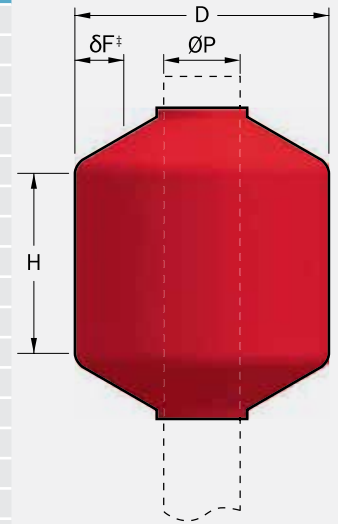


Increasing Donut height (H) will increase reaction and energy proportionately.

Other sizes, material grades and performance available upon request. Please contact Trelleborg Marine Systems' local offices.

* values for H = 1000mm.


† values for H = 1 foot.

‡ all performances at δF = 60% of Donut resilient foam wall thickness.

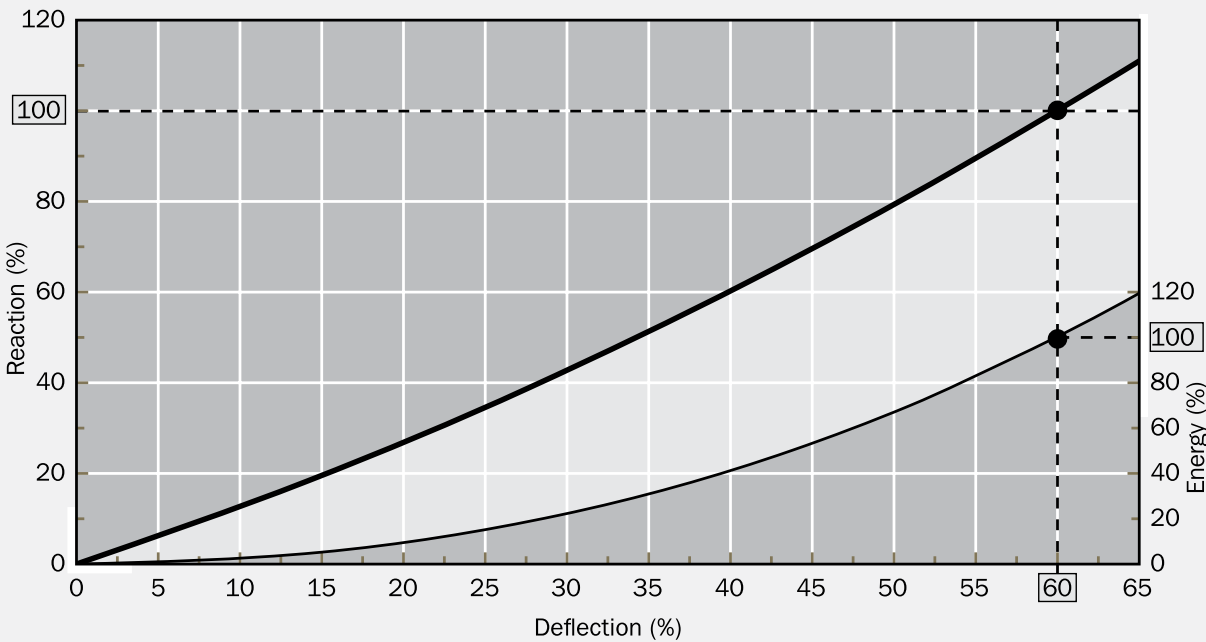

Note: Standard manufacturing and performance tolerance:
 Energy: 100%, Reaction: 100%, Tolerance: ± 10%

- 1. GERMANY
- 2. UK
- 3. USA
- 4. USA
- 5. BAHAMAS
- 6. ROTTERDAM
- 7. IRELAND
- 8. UK

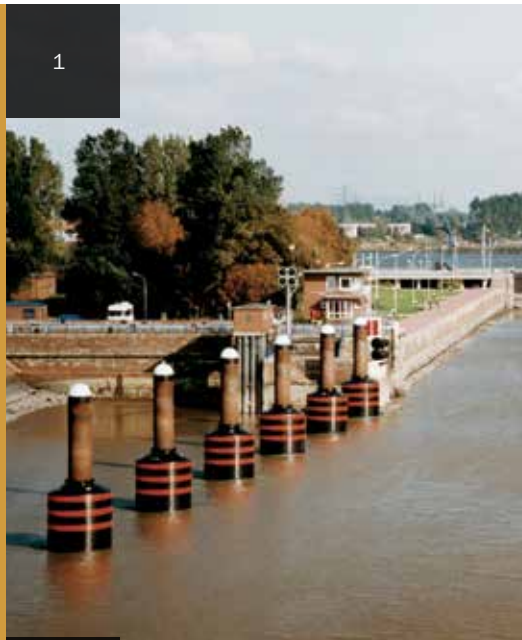

SeaBarrier®



Floating Barrier Systems are designed to provide a reliable, highly visible floating physical barrier that is easy to install and maintain.

FEATURES

Utilizes proven SeaGuard® technology

Low maintenance

High visibility, high freeboard

Durable, long life materials

Easy to transport, deploy and relocate

Foam filled construction will not lose buoyancy if punctured

High pull-through strength

APPLICATIONS

Military facilities and vessels

Ports and harbors

Cruise ship and marine casino facilities

Refineries and petrochemical plants

Power plants

Airports

Temporary blockades of vital waterways

Other marine security applications

The design of Trelleborg's SeaBarrier® is founded on the proven technology, materials and tested performance of SeaGuard® foam filled marine fenders that have set the international industry standard for over 30 years. It is designed to provide the energy absorption, unsinkable buoyancy, and ease of deployment to effectively and quickly create a barrier to any intruder.

The smaller sizes are primarily intended for use as a demarcation or delineation barrier to mark an exclusionary zone while larger sizes add a significant physical barrier to meet specific security requirements.

Available in various sizes, profiles and colors, the SeaBarrier® can be custom designed to meet your specific requirements. Standard units are delivered with a bright, highly visible international orange color and include connection hardware. Optional accessories include buoys and modified donut fender style moorings, anchorage devices, capture net systems and a wide range of interconnecting fittings designed to work with the SeaBarrier® units.




USA

Specification

Dimensions are for one SeaBarrier® module. Overall length includes hardware supplied with the unit. Weight is per module, including hardware.

| IMPERIAL SIZES | MODEL NUMBER | DIAMETER (ft) | OVERALL LENGTH (ft) | PULL-THROUGH SWL (pounds) |
|----------------|--------------|-------------------|-------------------------|---------------------------|
| | SB220 | 2.0 | 20 | 30,000 |
| | SB420 | 4.0 | 20 | 50,000 |
| | SB620 | 6.0 | 20 </td <td>50,000</td> | 50,000 |
| | SB820 | 8.0 | 20 | 70,000 |
| METRIC SIZES | MODEL NUMBER | DIAMETER (meters) | OVERALL LENGTH (meters) | PULL-THROUGH SWL (tons) |
| | SB500 | 0.5 | 6.6 | 13.6 |
| | SB1000 | 1.0 | 6.7 | 22.7 |
| | SB2000 | 2.0 | 6.7 | 22.7 |
| | SB3000 | 3.0 | 7.0 | 31.8 |

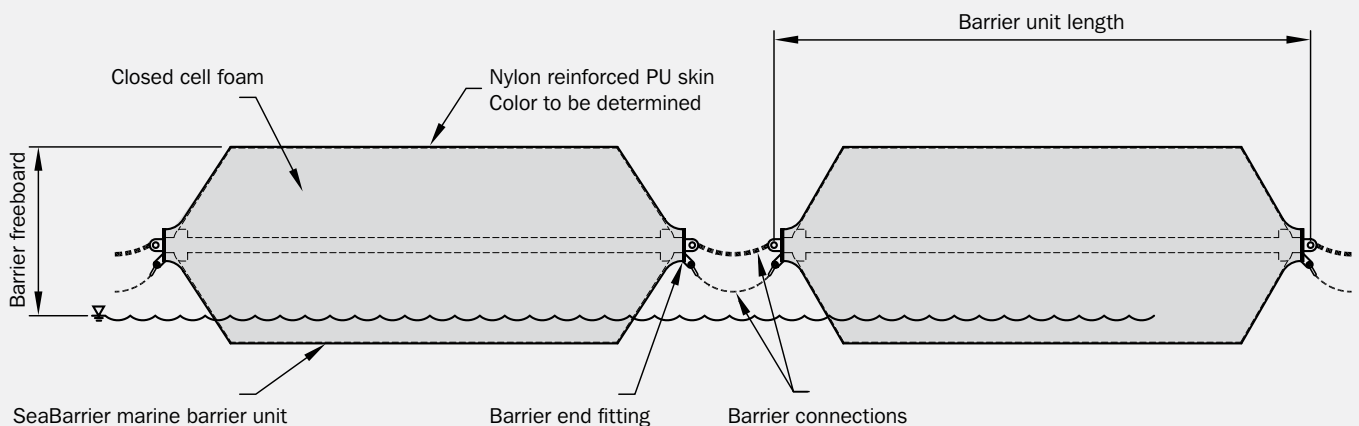

Foam Fenders – Product Material Tables

CONSTRUCTION

*Standard Foam Material Properties

| TEST ITEM | TEST METHOD | REQUIRED VALUE |
|-------------------------|----------------------|------------------------------------|
| Density | ASTM D-3575 Suffix W | 62 kg / cu m (+/-10%) |
| Tensile strength | ASTM D-3575 Suffix T | 289 kPa Min. |
| Elongation | ASTM D-3575 Suffix T | 95 % Min. |
| Tear resistance | ASTM D-3575 Suffix G | 2.2 kN/m Min. |
| Compressive strength | | |
| 10% Deflection | | 27 kPa Min. |
| 25% Deflection | ASTM D-3575 Suffix D | 48 kPa Min. |
| 40% Deflection | | 77 kPa Min. |
| 50% Deflection | | 110 kPa Min. |
| Compression set average | ASTM D-3575 Suffix B | 17.2 % |
| Thermal stability | ASTM D-3575 Suffix S | <0.5 % change (24 hrs at 70 deg C) |
| Water absorption | ASTM D-3575 Suffix L | <0.34 kg / sq m (skived) |
| Flammability | FMVSS302 | Pass |
| | PPP-C-1752B | -54 deg C to 99 deg C |

Polyurethane Elastomer Skin Material Property Requirements

| TEST ITEM | TEST METHOD | REQUIRED VALUE |
|----------------------------|-------------|---------------------------|
| Shore A durometer hardness | ASTM D-2240 | 75-95 |
| Tensile strength | ASTM D-412 | 13.8 MPa Min. |
| Elongation | ASTM D-412 | 300% Min. |
| Tear strength | ASTM D-624 | 32.4 kN/m Min. |
| Flex life (ross) | ASTM D-1052 | 100,000 Cycles Min. Break |
| Abrasion resistance (NBS) | ASTM D-1630 | 100 |

Nylon Filament Reinforcement Material Property Requirements

| TEST ITEM | TEST METHOD | REQUIRED VALUE |
|-----------------------|-------------|----------------|
| Nylon cord weight | ASTM D-885 | 0.280 g/m avg. |
| Breaking strength | ASTM D-885 | 231 N avg. |
| Elongation (ultimate) | ASTM D-885 | 16% avg. |

Nylon Filament Reinforced Elastomer Skin Material Property Requirements

| TEST ITEM | TEST METHOD | REQUIRED VALUE |
|------------------|-------------|----------------|
| Tensile strength | ASTM D-412 | 31.0 Mpa Min. |
| Elongation | ASTM D-412 | 16% Min. |
| Tear strength | ASTM D-624 | 78.8 kN/m Min. |

*Foam Material Properties vary based on the Material grades used. Contact your local office for Foam Fender specification.

Foam Fenders – Manufacturing Facilities



Trelleborg Marine Systems Berryville, Inc.

In March 2016, Trelleborg Marine Systems officially opened its state of the art foam fender manufacturing facility in Berryville VA (Trelleborg Marine Systems Berryville, Inc.) Prior to this, foam fenders were produced a few miles away in Clearbrook VA over the past 40 years.

The Berryville facility was designed to accommodate all the production needs of foam products as well as to provide world class office facility. With over

50,000 sq-ft (5,000m²) of combined production and office space, the new state of the art facility was designed specifically for the production of Trelleborg's industry leading range of foam filled fenders, donut fenders and buoys.

The facility holds ISO 9001:2008 and ISO 14001:2004 certification as well as ABS type approval for its Sea Guard™ Product.

HALO Fenders



HALO fender is a premium pneumatic fender from Trelleborg Marine Systems and Teekay Marine Solutions designed to meet the demands of the Ship to Ship (STS) transfer market and the wider marine industry.

FEATURES

ISO 17357-1:2014 compliant

Easy and fast to deploy

Very low reaction and hull pressure

Suitable for small and large tidal ranges

Maintains large clearances between hull and structure

APPLICATIONS

Oil and gas tankers

Fast ferries and aluminium vessels

Temporary and permanent installations

Rapid response and emergencies

HALO Fenders

STRENGTHENING PROTECTION THROUGH PARTNERSHIP

Combining the strength and experience of two industry leaders, HALO fenders from Trelleborg Marine Systems and Teekay Marine Solutions enable operators to source, deploy and maintain pneumatic fenders safely and efficiently, with a reassuring service structure that ensures these high quality solutions are supported for the life of the project.

THE HALO EFFECT

HALO fenders bring together Trelleborg's manufacturing capability and Teekay's operations expertise to offer a host of operational, technical and service benefits, including:

- Full compliance with ISO 17357-1:2014
- A wide range of fender sizes stocked at strategic locations around the world
- Fast and convenient delivery
- Available to buy or rent
- Backed by exceptional technical and service support



COMMERCIAL FLEXIBILITY

The expanded HALO fender offering also extends to enhanced commercial support with options to both purchase and rent fenders so that operators can align solutions to their operations and financial situation, selecting whichever option that best fits their overall needs.

UNIQUE SERVICING AND SUPPORT

The new HALO fender offering provides customers with a single point of contact for consulting and supply, from product specification, to delivery, through to comprehensive field services.

Support services include:

- Fender selection
- Specification advice
- Chain tire net fitting
- Mobilization
- Certification and documentation
- Maintenance
- Repair

SUPPORT WHEREVER YOU NEED IT

With HALO, we hold new stock in three strategic locations, ensuring fast global delivery through our comprehensive transport and logistics network. We also have 32 rental and service bases with a fleet of 400 fenders to ensure we can provide fast, local maintenance and repair.

For more information and full technical details of HALO fenders, please refer to the HALO fender brochure.

Hydro Pneumatic Fenders



Submarines and other vessels which contact fenders below waterline require a unique solution. Hydro pneumatic fenders are specially adapted to this application.

The fender body is partially water-filled, then pressurized with air and ballasted to make it stand vertically. Fender draft and performance can be tuned by altering the water : air ratio and inflation pressure.

FEATURES

Sub-surface contact face

Very low hull pressures

Variable draft

Prevents acoustic tile damage


APPLICATIONS

Submarines

Some fast ferries

Semi-submersible oil rigs

Hydro Pneumatic Fenders

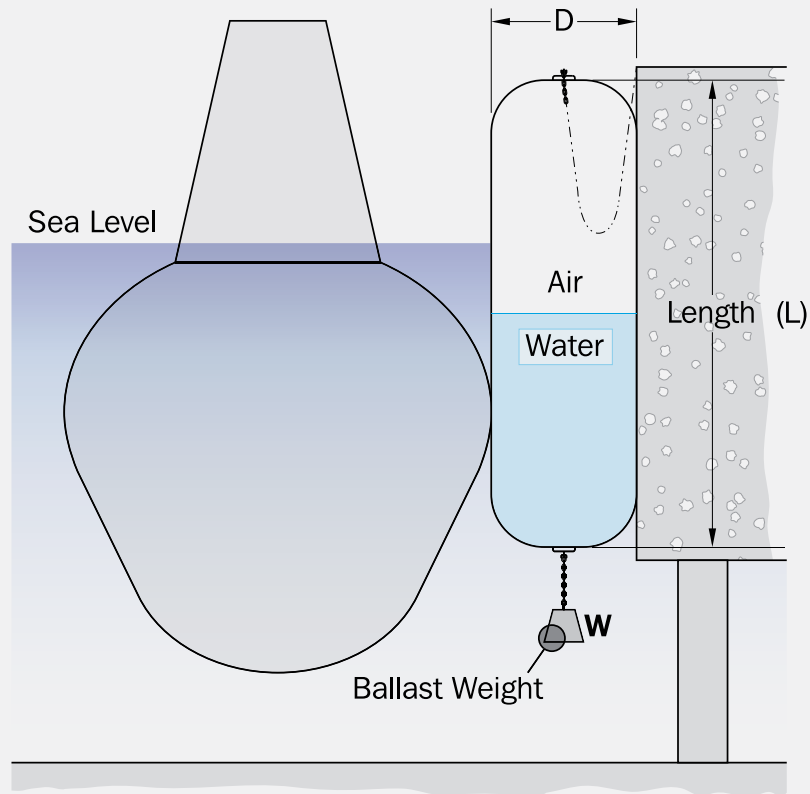

| FENDER | | WATER (%) | D (%) | INITIAL PRESSURE 0.5BAR (7.1psi) | |
|----------------|--------------|-----------|-------|----------------------------------|---------------|
| DIAMETER D(mm) | LENGTH L(mm) | | | ENERGY (kNm) | REACTION (kN) |
| 2000 | 6000 | 65 | 45 | 155 | 599 |
| | | 0 | 60 | 647 | 1766 |
| 2500 | 5500 | 65 | 45 | 223 | 687 |
| | | 0 | 60 | 928 | 2037 |
| 3300 | 6500 | 60 | 45 | 616 | 1247 |
| | | 0 | 60 | 1913 | 3169 |
| 3300 | 10500 | 55 | 45 | 589 | 1275 |
| | | 0 | 60 | 3120 | 5170 |

Due to the very specialist nature of Hydro-pneumatic fenders, it is strongly advised that a detailed study be carried out for each case. Please ask for assistance with this.

Low Pressure Pneumatic Fenders



Trelleborg's low-pressure (LP) floating pneumatic fenders play an essential role in the safe berthing of ships at sea in an emergency or other operations such as refuelling.

FEATURES

Avoids high hull pressure during berthing

Spreads berthing loads over a large area to produce the lowest reaction force of any fender

Lowest reaction force of any fender

Ideal for non-metallic or thin-hulled vessels and vessels with sensitive electronic systems

APPLICATIONS

Ship to ship transfer and refuelling

Offshore mooring

Naval applications

Salvage and cargo recovery

Emergency floatation

Military operations at sea

Low Pressure Pneumatic Fenders

GENERAL DESCRIPTION

| | |
|-----------------------------------|--|
| UNIT SPECIFICATION | Manufactured in diameters from 1.0m to 4.5m; lengths of fenders can be made to customer requirements. |
| MATERIALS AND CONSTRUCTION | Constructed from a woven high tenacity, continuous filament nylon-based fabric, coated on both sides with an abrasion resistant synthetic rubber compound. Individual sections are constructed such that they are of strength equivalent to the base material or fabric. |
| LOAD REACTION | The maximum specific load reaction pressure that can be developed from a LP fender occurs at at 60% compression and is 11 tonnes per m2. |
| ENERGY ABSORPTION | Dependent on the size of the fender. |
| INFLATION AND DEFLATION | Units operate at a nominal pressure of 70mbar (1Psi). Any convenient air supply, compressor or blower can be used for inflation. |

Trelleborg's LP pneumatic fenders are made to the ISO 17357-2:2014 specification.

LP Fender units can easily be carried, inflated and deployed in a range of emergency applications via air, sea or land. This flexibility makes them particularly suited to ship to ship operations and has a significant impact on time and costs of transport. As they can be transported and deployed quickly, the fenders are key to preventing oil spill from damaged vessels, thereby minimizing damage to people and the environment.

Easy to deflate and store for later use. When deflated they can be rolled into small, lightweight packages and are therefore increasingly becoming a permanent Health and Safety requirement onboard ships. This can in turn reduce the insurance costs for vessel operation. As they operate at a nominal pressure of 70mbar (1Psi), any convenient air supply, compressor or blower, can be used for inflation. The low pressure also makes repairs and maintenance easier to carry out.

Durable and unencumbered by external fittings, the units can be towed while inflated and attachments suitable for towing and mooring can be provided at each end of the fender. In addition girthing ropes are fitted for ease of handling, and are easily maneuvered with ordinary ships' mechanical handling gear.

Low Pressure Pneumatic Fenders

PERFORMANCE DATA

Low pressure fender size and performance requirements

| NOMINAL SIZE | | GUARANTEED ENERGY ABSORPTION (GEA) | REACTION FORCE AT GEA DEFLECTION (R) | HULL PRESSURE AT GEA DEFLECTION (P) |
|--------------|--------|------------------------------------|--------------------------------------|-------------------------------------|
| DIAMETER | LENGTH | MIN VALUE AT DEFLECTION 60% +/- 5% | TOLERANCE +/- 10% | REFERENCE VALUE |
| m | m | kj | kN | kPa |
| 1.0 | 3 | 26 | 190 | 80 |
| 1.0 | 5 | 52 | 380 | 89 |
| 1.0 | 6 | 65 | 477 | 91 |
| 1.0 | 8 | 91 | 661 | 94 |
| 1.5 | 4 | 90 | 361 | 78 |
| 1.5 | 5 | 126 | 501 | 85 |
| 1.5 | 6 | 162 | 641 | 90 |
| 1.5 | 8 | 235 | 932 | 97 |
| 1.8 | 6 | 169 | 721 | 79 |
| 1.8 | 8 | 261 | 1082 | 87 |
| 1.8 | 10 | 350 | 1452 | 91 |
| 1.8 | 12 | 440 | 1803 | 94 |
| 2.3 | 8 | 381 | 1227 | 81 |
| 2.3 | 10 | 511 | 1673 | 85 |
| 2.3 | 12 | 651 | 2123 | 88 |
| 2.3 | 16 | 922 | 3005 | 91 |
| 2.75 | 10 | 676 | 1886 | 80 |
| 2.75 | 14 | 1051 | 2985 | 86 |
| 2.75 | 18 | 1422 | 4007 | 88 |
| 2.75 | 22 | 1803 | 5108 | 91 |
| 3.2 | 12 | 1112 | 2684 | 81 |
| 3.2 | 16 | 1623 | 3906 | 86 |
| 3.2 | 20 | 2123 | 5108 | 88 |
| 3.2 | 24 | 2624 | 6330 | 90 |
| 4.5 | 16 | 3055 | 4960 | 84 |
| 4.5 | 18 | 3607 | 5810 | 86 |
| 4.5 | 20 | 4055 | 6639 | 87 |
| 4.5 | 22 | 4667 | 7562 | 89 |
| 4.5 | 30 | 6813 | 11020 | 93 |

Low pressure fender rubber coating compound requirements

| | TEST | SPECIFICATION | TEST METHOD |
|---------------------|--------------------------------------|-------------------|-------------|
| Unaged | Hardness | 60 - 70 IRHD | ISO 48 |
| | Tensile strength | >14 Mpa | ISO 37 |
| | Elongation at break | > 300% | ISO 37 |
| | Compression set (24 h, 40°C) | <40% | ISO815-1 |
| Static ozone ageing | 168 h, 20% extension, 50 pphma, 30°C | No visible cracks | ISO 1431-1 |


Low Pressure Pneumatic Fenders

ACCESSORIES

- Blower unit
- Medium duty delivery and suction hose
- Inflation adaptor
- Transportation / storage case
- Repair kits
- Pressure gauge assembly
- Lifting slings
- Cargo nets

| NOMINAL SIZE (m) | | NOMINAL WEIGHT (kg) | APPROX. FOLDED SIZE (m) LENGTH X WIDTH X HEIGHT | (TYPICAL) FENDER END CONSTRUCTION |
|------------------|--------|---------------------|--|-----------------------------------|
| DIAMETER | LENGTH | | | |
| 1.0 | 5.0 | 90 | 1.5 x 0.8 x 0.7 | Parcel End |
| 1.0 | 6.0 | 110 | 1.5 x 0.9 x 0.7 | |
| 1.0 | 8.0 | 140 | 1.5 x 0.9 x 0.8 | |
| 1.5 | 4.0 | 110 | 1.6 x 0.8 x 0.7 | |
| 1.5 | 5.0 | 135 | 1.6 x 0.9 x 0.8 | |
| 1.5 | 6.0 | 160 | 1.6 x 1.0 x 0.9 | |
| 1.5 | 8.0 | 210 | 1.6 x 1.0 x 1.0 | |
| 1.8 | 6.0 | 210 | 1.8 x 1.0 x 0.9 | |
| 1.8 | 8.0 | 270 | 1.8 x 1.0 x 1.0 | |
| 1.8 | 10.0 | 330 | 1.8 x 1.2 x 1.1 | Clamped End |
| 1.8 | 12.0 | 390 | 1.8 x 1.2 x 1.2 | |
| 2.3 | 8.0 | 360 | 2.0 x 1.0 x 1.0 | |
| 2.3 | 10.0 | 440 | 2.0 x 1.2 x 1.0 | |
| 2.3 | 12.0 | 520 | 2.0 x 1.2 x 1.2 | |
| 2.3 | 16.0 | 680 | 2.0 x 1.4 x 1.3 | |
| 2.75 | 10.0 | 600 | 3.8 x 1.3 x 1.25 | Molded End |
| 2.75 | 14.0 | 800 | 3.8 x 1.45 x 1.35 | |
| 2.75 | 18.0 | 1200 | 3.8 x 1.6 x 1.4 | |
| 2.75 | 22.0 | 1600 | 3.8 x 1.7 x 1.55 | |
| 3.2 | 12.0 | 800 | 3.8 x 1.4 x 1.3 | |
| 3.2 | 16.0 | 1040 | 3.8 x 1.5 x 1.4 | |
| 3.2 | 20.0 | 1280 | 3.8 x 1.65 x 1.5 | |
| 3.2 | 24.0 | 1520 | 3.8 x 1.75 x 1.6 | |
| 4.5 | 18.0 | 1600 | 3.8 x 1.6 x 1.45 | |
| 4.5 | 22.0 | 2000 | 3.8 x 1.7 x 1.6 | |
| 4.5 | 26.0 | 2400 | 3.8 x 1.8 x 1.75 | |
| 4.5 | 30.0 | 2800 | 3.8 x 1.9 x 1.9 | |

Low Pressure Pneumatic Fenders

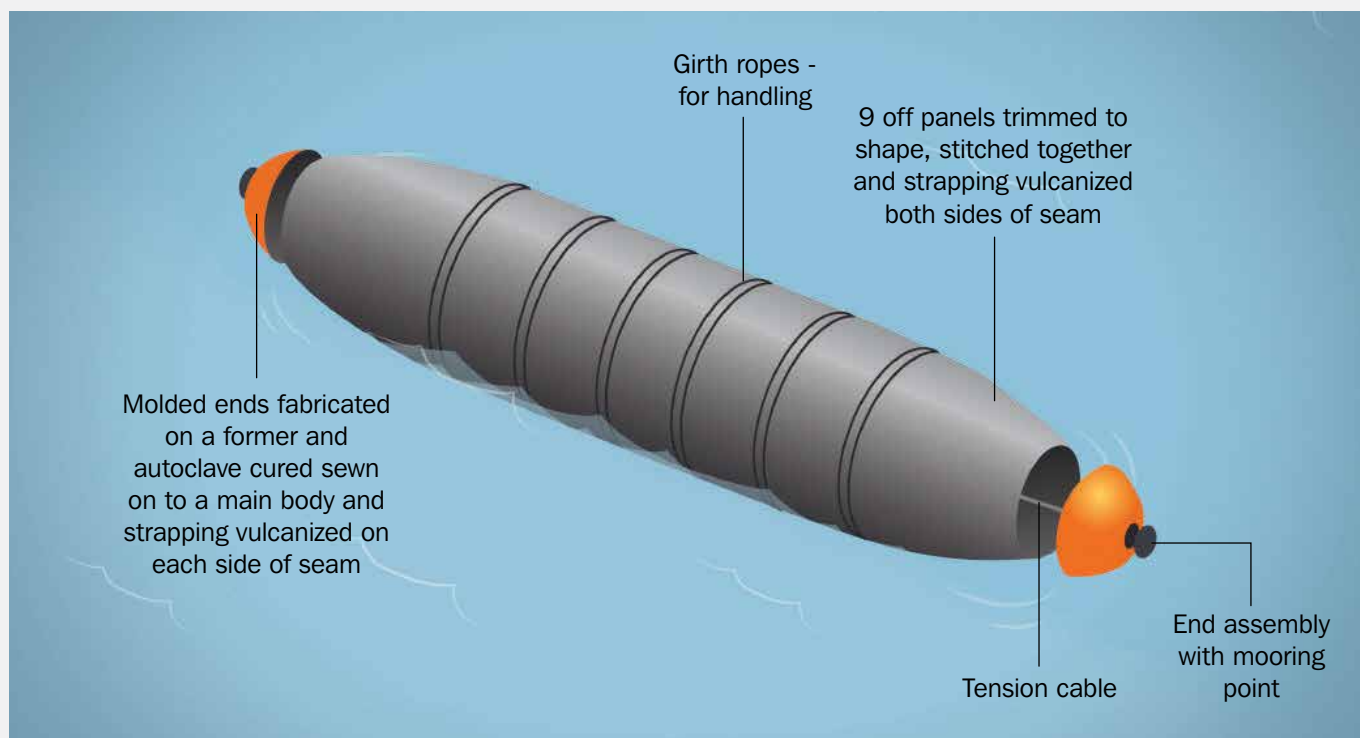

| TEST | STANDARD | DESCRIPTION | REMARKS |
|------------------------|---|--|---|
| Material testing | Various international standards. ISO 17357-2 | Properties of the rubber coating compound | Hardness / tensile / elongation before aging to be tested on every batch. Static Ozone Aging, type approval for any new formulations. |
| Dimensional inspection | | Properties of the coated textile | Abrasion resistance / breaking and tear strength. Surface coat adhesion to be tested on every production lot. |
| | | Length +10%, -5% Diameter +15%, -5% | Dimensional inspection to be carried out at the working pressure. |
| Air leakage | | Pressure drop and soapy water test carried out at the working pressure | All fenders to be tested for each and every order. |
| Hydrostatic test | | 1.6 x 0.9 x 0.8 | The frequency of the test shall be one in 20 fenders for each size. |

Trelleborg's low pressure pneumatic fenders have also undergone third party type approval testing based on the requirements of ISO 17357:2002.

These tests included parallel plate compression, compression recovery, angular compression and durability testing. The results of these tests

confirmed previous test data and theoretical performance ratings and were witnessed, reviewed and endorsed by the American Bureau of Shipping. Further details of the testing procedures and the results can be provided on request.

APPLICATIONS

1. 4.5M FENDER ON AIR TEST
2. COASTGUARD RECOVERY AT SEA
3. SHIP TO SHIP LNG TRANSFER
4. FENDER PREPARATION AT SEA
5. SHIP TO SHIP RECOVERY

1



2



3



4



5




Fender Deployment Systems



Trelleborg Marine Systems not only supplies easy-to-deploy floating fenders, we also offer fender deployment systems to deploy, retrieve and store fenders.

In recent years Trelleborg Marine Systems focused on the development of fender deployment systems for the growing FSRU and FLNG applications. This market niche offers unique challenges due to the space restrictions on board FLNG and FSRU, which are driving the re-think of the common fender deployment system: current solutions explore telescopic arms or A-frame type davits to safely store the fenders on deck or over the hull during bad weather or routine maintenance inspections. Other features are: pneumatic fender pressure monitoring, hazardous rating and auto-tension system for lifting wire.

Trelleborg Marine Systems' expertise in fender manufacture, rubber technology and marine engineering mean an integrated solution from one supplier.

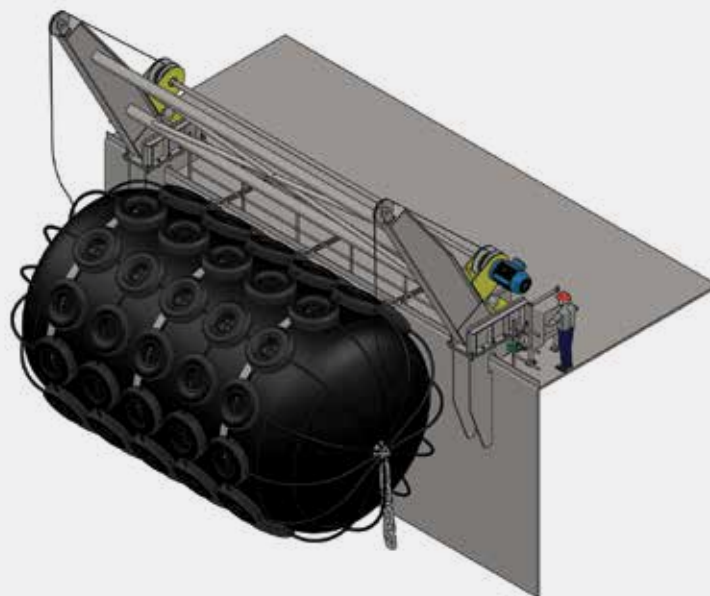

Davit suitable for pneumatic and foam fenders.
Standard sizes to suit 3.3 x 6.5 and 4.5 x 9.0 fenders.

Accessories

Chains

Some fender systems need chains to help support heavy components or to control how the fender deflects and shears during impact. Open link or stud link chains are commonly used and these can be supplied in several different strength grades.

FEATURES

Choice of open or stud link chains

Various link lengths available

Proof load tested and certified

Galvanized as standard

Variety of matched accessories

APPLICATIONS

Large fender panels

Cylindrical fenders


Floating fender moorings

Safety applications

Lifting and installing

TYPICAL CHAIN SYSTEM

- 1 Anchors and fixing bolts
- 2 Chain bracket
- 3 Alloy D or bow-shackle with safety pin
- 4 Chain tensioner
- 5 Open or stud link chain
- 6 Frontal frame bracket
- 7 Frontal frame

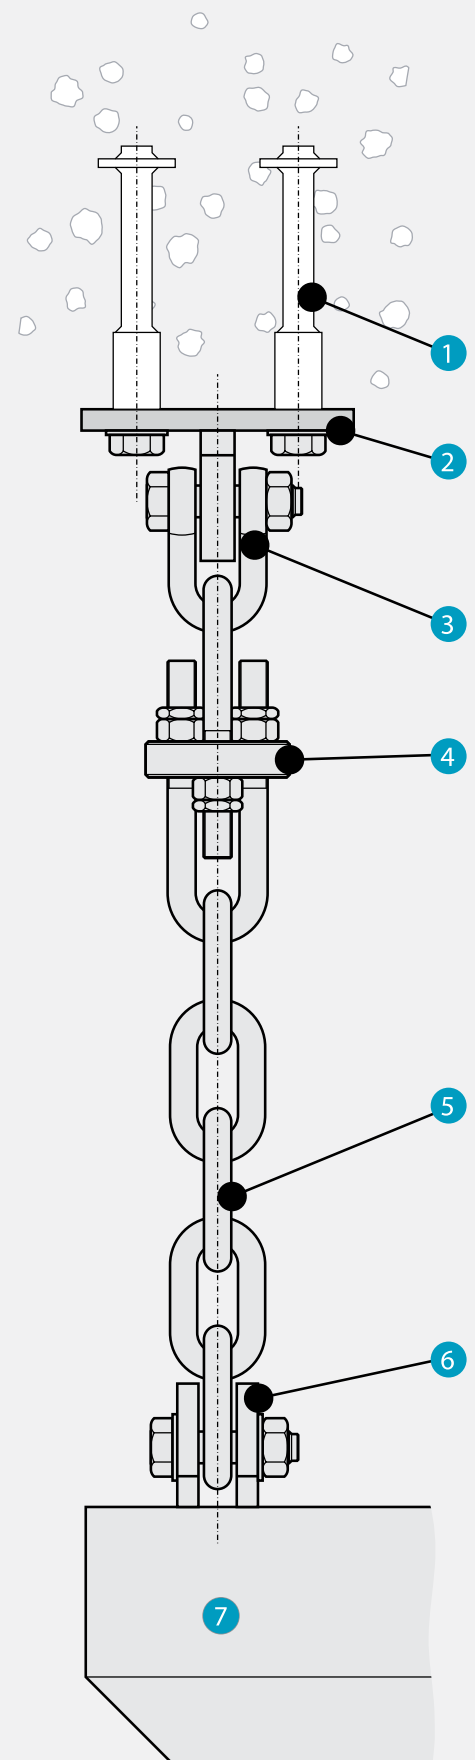


Chains

OPEN LINK CHAINS

| ØC | 3.0D LINKS | | | 3.5D LINKS | | | 4.0D LINKS | | | 5.0D LINKS | | | MBL | |
|----|------------|----|--------|------------|----|--------|------------|----|--------|------------|----|--------|------|------|
| | L | W | WEIGHT | L | W | WEIGHT | L | W | WEIGHT | L | W | WEIGHT | SL2 | SL3 |
| 14 | 42 | 18 | 0.2 | 49 | 20 | 0.2 | 56 | 20 | 0.2 | 70 | 21 | 0.3 | 124 | 154 |
| 16 | 48 | 21 | 0.3 | 56 | 22 | 0.3 | 64 | 22 | 0.3 | 80 | 24 | 0.4 | 160 | 202 |
| 18 | 54 | 23 | 0.4 | 63 | 25 | 0.4 | 72 | 25 | 0.5 | 90 | 27 | 0.5 | 209 | 262 |
| 20 | 60 | 26 | 0.5 | 70 | 28 | 0.6 | 80 | 28 | 0.6 | 100 | 30 | 0.8 | 264 | 330 |
| 22 | 66 | 29 | 0.7 | 77 | 31 | 0.8 | 88 | 31 | 0.8 | 110 | 33 | 1.0 | 304 | 380 |
| 25 | 75 | 33 | 1.1 | 88 | 35 | 1.1 | 100 | 35 | 1.2 | 125 | 38 | 1.5 | 393 | 491 |
| 28 | 84 | 36 | 1.4 | 98 | 39 | 1.6 | 112 | 39 | 1.7 | 140 | 42 | 2.0 | 492 | 616 |
| 30 | 90 | 39 | 1.8 | 105 | 42 | 2.0 | 120 | 42 | 2.1 | 150 | 45 | 2.5 | 566 | 706 |
| 32 | 96 | 42 | 2.2 | 112 | 45 | 2.4 | 128 | 45 | 2.5 | 160 | 48 | 3.0 | 644 | 804 |
| 35 | 105 | 46 | 2.8 | 123 | 49 | 3.1 | 140 | 49 | 3.3 | 175 | 53 | 4.0 | 770 | 964 |
| 38 | 114 | 49 | 3.6 | 133 | 53 | 3.9 | 152 | 53 | 4.3 | 190 | 57 | 5.1 | 900 | 1130 |
| 40 | 120 | 52 | 4.2 | 140 | 56 | 4.6 | 160 | 56 | 5.0 | 200 | 60 | 6.0 | 1010 | 1260 |
| 45 | 135 | 59 | 6.0 | 158 | 63 | 6.5 | 180 | 63 | 7.1 | 225 | 68 | 8.5 | 1275 | 1590 |
| 50 | 150 | 65 | 8.2 | 175 | 70 | 8.9 | 200 | 70 | 9.7 | 250 | 75 | 12 | 1570 | 1960 |
| 55 | 165 | 72 | 11 | 193 | 77 | 12 | 220 | 77 | 13 | 275 | 83 | 16 | 1900 | 2380 |
| 60 | 180 | 78 | 14 | 210 | 84 | 15 | 240 | 84 | 17 | 300 | 90 | 20 | 2260 | 2770 |

[Units: mm, kg/link, kN]

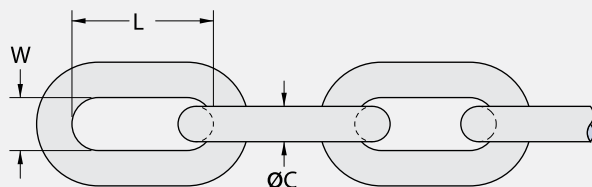


MBL = Minimum Breaking Load (kN)
 NBL = Nominal Breaking Load (kN)
 Tolerance: all dimensions ± 2.5%

STUD LINK CHAINS

| ØC | COMMON LINK | | | MBL | |
|----|-------------|-----|--------|----------|----------|
| | L | W | WEIGHT | SL2 (U2) | SL3 (U3) |
| 19 | 76 | 68 | 0.6 | 210 | 300 |
| 22 | 88 | 79 | 0.9 | 280 | 401 |
| 26 | 104 | 94 | 1.5 | 389 | 556 |
| 28 | 112 | 101 | 1.9 | 449 | 642 |
| 32 | 128 | 115 | 2.8 | 583 | 833 |
| 34 | 136 | 122 | 3.4 | 655 | 937 |
| 38 | 152 | 137 | 4.7 | 812 | 1160 |
| 42 | 168 | 151 | 6.3 | 981 | 1400 |
| 44 | 176 | 158 | 7.3 | 1080 | 1540 |
| 48 | 192 | 173 | 9.4 | 1270 | 1810 |
| 52 | 208 | 187 | 12 | 1480 | 2110 |
| 58 | 232 | 209 | 17 | 1810 | 2600 |
| 64 | 256 | 230 | 22 | 2190 | 3130 |
| 70 | 280 | 252 | 30 | 2580 | 3690 |
| 76 | 304 | 274 | 38 | 3010 | 4300 |
| 90 | 360 | 324 | 63 | 4090 | 5840 |


[Units: mm, kg/link, kN]

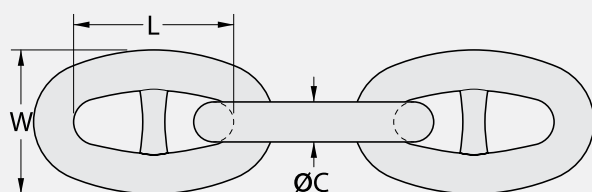

CHAIN TENSIONERS

| CHAIN SIZE | ØA | L | W | WEIGHT |
|------------|-----|----------|-----|--------|
| 16 | M16 | 200-240 | 40 | 2.7 |
| 18 | M18 | 220-280 | 45 | 2.5 |
| 20 | M20 | 235-305 | 50 | 5.3 |
| 22 | M22 | 265-345 | 56 | 6.6 |
| 22 | M24 | 280-370 | 60 | 8.8 |
| 25 | M27 | 310-420 | 68 | 12 |
| 30 | M30 | 345-465 | 76 | 17 |
| 32 | M33 | 385-525 | 82 | 21 |
| 35 | M36 | 420-560 | 90 | 27 |
| 40 | M42 | 480-650 | 106 | 45 |
| 45 | M48 | 545-745 | 120 | 64 |
| 50 | M52 | 595-805 | 130 | 80 |
| 55 | M56 | 640-880 | 140 | 99 |
| 60 | M60 | 685-945 | 150 | 122 |
| 60 | M64 | 730-1010 | 160 | 147 |

[Units: mm, kg]

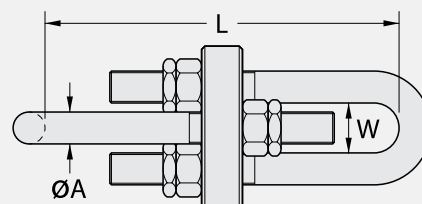


High Strength Shackles

| ØD | ØF | ØH | G | DEE SHACKLE | | BOW SHACKLE | | | NBL |
|-----|-----|-----|-----|-------------|--------|-------------|-----|--------|------|
| | | | | E | WEIGHT | E | ØJ | WEIGHT | |
| 13 | 16 | 26 | 22 | 43 | 0.4 | 51 | 32 | 0.4 | 120 |
| 16 | 19 | 32 | 27 | 51 | 0.7 | 64 | 43 | 0.8 | 195 |
| 19 | 22 | 38 | 31 | 59 | 1.1 | 76 | 51 | 1.3 | 285 |
| 22 | 25 | 44 | 36 | 73 | 1.5 | 83 | 58 | 1.9 | 390 |
| 25 | 28 | 50 | 43 | 85 | 2.6 | 95 | 68 | 2.8 | 510 |
| 28 | 32 | 56 | 47 | 90 | 3.3 | 108 | 75 | 3.8 | 570 |
| 32 | 35 | 64 | 51 | 94 | 4.7 | 115 | 83 | 5.3 | 720 |
| 35 | 38 | 70 | 57 | 115 | 6.2 | 133 | 95 | 7.0 | 810 |
| 38 | 42 | 76 | 60 | 127 | 7.6 | 146 | 99 | 8.8 | 1020 |
| 45 | 50 | 90 | 74 | 149 | 13 | 178 | 126 | 15 | 1500 |
| 50 | 57 | 100 | 83 | 171 | 18 | 197 | 138 | 21 | 2100 |
| 57 | 65 | 114 | 95 | 190 | 28 | 222 | 160 | 29 | 2550 |
| 65 | 70 | 130 | 105 | 203 | 35 | 254 | 180 | 41 | 3330 |
| 75 | 80 | 150 | 127 | 230 | 60 | 330 | 190 | 65 | 5100 |
| 89 | 95 | 178 | 146 | 267 | 93 | 381 | 238 | 110 | 7200 |
| 102 | 108 | 204 | 165 | 400 | 145 | 400 | 275 | 160 | 9000 |


Please refer to your local office for detailed information

[Units: mm, kg, kN]

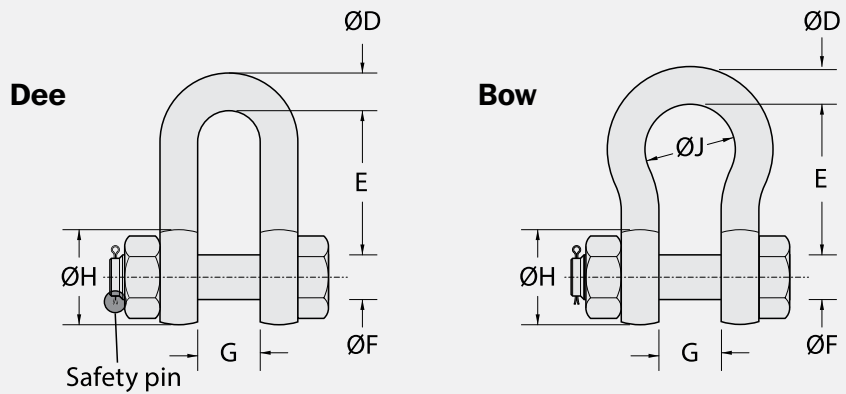

U-Anchors

| ØD | E | F | G | J | K | t | WEIGHT | NBL |
|----|-----|-----|-----|-----|-----|----|--------|------|
| 26 | 260 | 60 | 320 | 104 | 50 | 12 | 3.4 | 209 |
| 30 | 300 | 70 | 370 | 120 | 50 | 15 | 5.1 | 264 |
| 34 | 340 | 70 | 410 | 136 | 60 | 15 | 7.3 | 304 |
| 36 | 360 | 70 | 430 | 144 | 60 | 20 | 8.6 | 393 |
| 42 | 420 | 90 | 510 | 168 | 70 | 20 | 14 | 492 |
| 44 | 440 | 100 | 540 | 176 | 80 | 20 | 16 | 566 |
| 48 | 480 | 100 | 580 | 192 | 80 | 25 | 21 | 644 |
| 50 | 500 | 110 | 610 | 200 | 90 | 25 | 24 | 770 |
| 56 | 560 | 120 | 680 | 224 | 100 | 30 | 33 | 900 |
| 60 | 600 | 130 | 730 | 240 | 110 | 30 | 41 | 1010 |
| 66 | 660 | 140 | 800 | 264 | 120 | 35 | 55 | 1275 |
| 74 | 740 | 160 | 900 | 296 | 130 | 40 | 77 | 1570 |

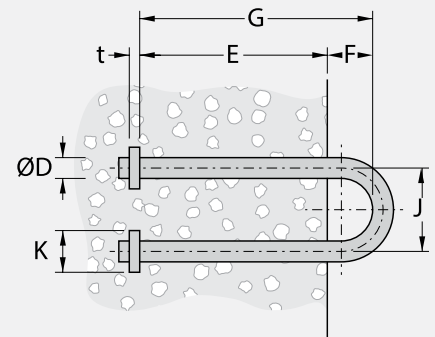




[Units: mm, kg, kN]

Brackets





| A | B | C | E | | F | Ød | R | t | T | SINGLE LUG | | TWIN LUG | | ANCHOR |
|-----|-----|----|---------|-----|-----|----|-----|----|----|------------|----|-----------|----|-----------|
| | | | CB1/CB3 | CB2 | | | | | | SHACKLE | ØD | BOLT PIN | ØD | |
| 190 | 110 | 40 | 20 | 75 | 160 | 24 | 40 | 15 | 30 | 19 | 28 | M24 x 90 | 28 | 2/4 x M20 |
| 220 | 130 | 45 | 20 | 90 | 190 | 24 | 50 | 15 | 30 | 22 | 28 | M24 x 90 | 28 | 2/4 x M20 |
| 250 | 150 | 50 | 25 | 100 | 210 | 28 | 55 | 20 | 40 | 25 | 36 | M30 x 120 | 36 | 2/4 x M24 |
| 280 | 160 | 60 | 25 | 115 | 240 | 28 | 65 | 20 | 40 | 28 | 36 | M30 x 120 | 36 | 2/4 x M24 |
| 320 | 190 | 65 | 35 | 130 | 270 | 36 | 75 | 25 | 45 | 32 | 42 | M36 x 140 | 42 | 2/4 x M30 |
| 350 | 210 | 70 | 35 | 140 | 300 | 36 | 80 | 25 | 50 | 35 | 42 | M36 x 140 | 42 | 2/4 x M30 |
| 380 | 220 | 80 | 35 | 155 | 320 | 42 | 85 | 30 | 50 | 38 | 50 | M42 x 160 | 50 | 2/4 x M36 |
| 420 | 250 | 85 | 40 | 170 | 360 | 42 | 95 | 30 | 60 | 42 | 50 | M42 x 170 | 50 | 2/4 x M36 |
| 440 | 260 | 90 | 40 | 180 | 360 | 50 | 100 | 30 | 60 | 44 | 60 | M48 x 180 | 60 | 2/4 x M42 |

[Units: mm, kN]


S-Series

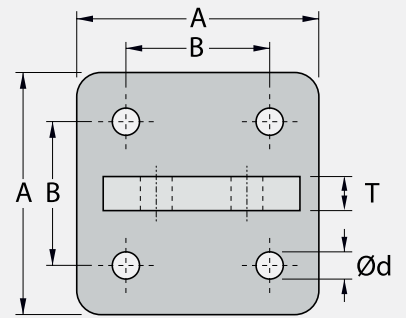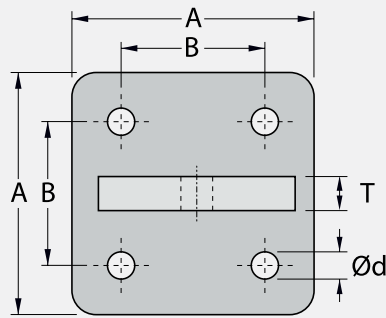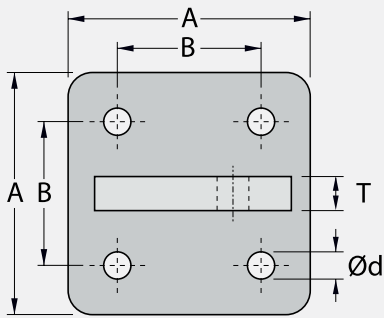


T-Series

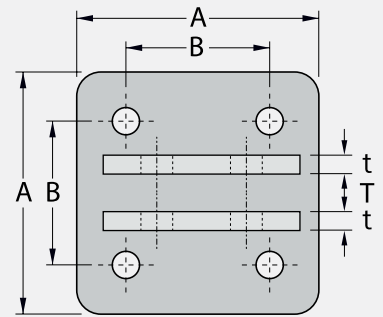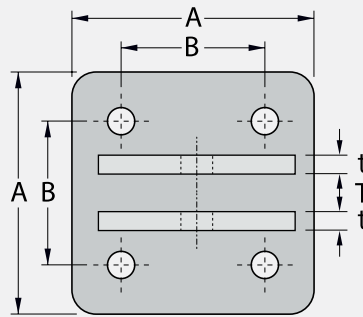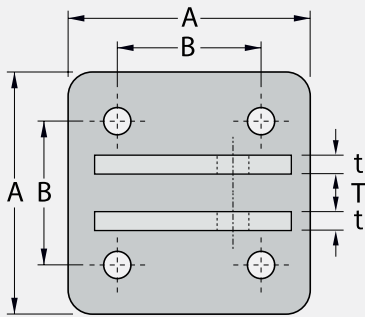

CB1



CB2



CB3

- All chain and accessory information is for guidance only.
- Every chain design should be checked to confirm suitability for the intended application.
- Select chain system components so $MBL \approx NBL$.
- Every chain system is different. Check all dimensions for fit, clearance and tolerance.

- Chain brackets can be specified with 2 or 4 anchors to suit application and loads.
- If extra long life is required, add a corrosion allowance.
- Some slack in the chain is unavoidable and will not affect operation.
- For special sizes and applications, please refer to Trelleborg Marine Systems' local office.

Anchors


NC3 ANCHORS

| THREAD | A | C | ØF | L | S (sq) | T | WEIGHT |
|--------|-----|-----|-----|-----|--------|----|--------|
| M20 | 40 | 60 | 30 | 200 | 63 | 10 | 1.1 |
| M22 | 44 | 66 | 32 | 225 | 63 | 10 | 1.4 |
| M24 | 48 | 73 | 36 | 250 | 75 | 10 | 1.9 |
| M27 | 54 | 84 | 40 | 265 | 75 | 10 | 2.4 |
| M30 | 60 | 95 | 45 | 270 | 100 | 10 | 3.5 |
| M36 | 72 | 112 | 54 | 320 | 100 | 12 | 5.5 |
| M42 | 84 | 134 | 63 | 360 | 100 | 12 | 8.1 |
| M48 | 96 | 156 | 72 | 400 | 100 | 15 | 12 |
| M56 | 112 | 182 | 84 | 550 | 120 | 15 | 20 |
| M64 | 128 | 208 | 100 | 600 | 130 | 20 | 30 |
| M76 | 152 | 242 | 114 | 700 | 150 | 20 | 46 |

Anchors available in mid steel, HDG, SS 316 or super duplex

[Units: mm, kg]

The NC3 is a traditional cast-in anchor design used for installing fenders to new concrete. The NC3 anchor has a threaded socket, a long tail and a square anchor plate. Non-standard sizes and other cast-in anchor types are available on request.

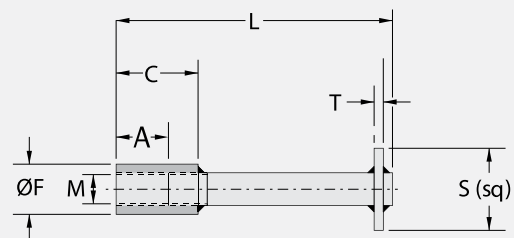

Always check min/max clamping thickness and socket depths actual threaded length on bolts.

EC2 ANCHORS

| THREAD | B | E | G | J | L (typ.) | ØS | CAPSULE | WEIGHT |
|--------|-----|---------|----|-----|----------|----|-------------------|--------|
| M12 | 110 | 5 – 8 | 10 | 2.5 | – | 15 | 1 × C12 | 0.15 |
| M16 | 140 | 6 – 9 | 13 | 3 | 175 | 20 | 1 × C16 | 0.26 |
| M20 | 170 | 6 – 9 | 16 | 3 | 240 | 25 | 1 × C20 | 0.57 |
| M24 | 210 | 8 – 12 | 19 | 4 | 270 | 28 | 1 × C24 | 0.92 |
| M27 | 240 | 8 – 12 | 22 | 4 | 330 | 30 | 1 × C24 | 1.42 |
| M30 | 280 | 8 – 12 | 24 | 4 | 360 | 35 | 1 × C30 | 1.91 |
| M36 | 330 | 10 – 15 | 29 | 5 | 420 | 40 | 1 × C30 | 3.21 |
| M42 | 420 | 14 – 21 | 34 | 7 | 500 | 50 | 2 × C30 | 5.21 |
| M48 | 480 | 16 – 24 | 38 | 8 | 580 | 54 | 2 × C30 + 1 × C24 | 7.90 |
| M56 | 560 | 18 – 27 | 45 | 9 | – | 64 | 4 × C30 | 13.0 |


[Units: mm, kg]

A = E + G + H + J, rounded up to nearest 10mm.

E = clear threads after assembly.

H = clamping thickness of fender.

The EC2 anchor is used for installing fenders onto existing concrete or where cast-in anchors are unsuitable. The anchor is usually secured into a drilled hole using special grout capsules. Non-standard sizes and other grout systems are available on request.

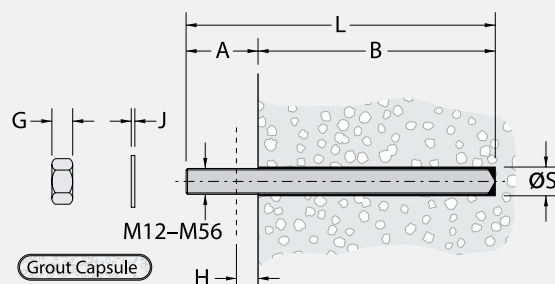

Always follow the manufacturer's instructions when installing EC2 anchors.

Fender Fixings

BOLTS, NUTS AND WASHERS

| SIZE | THREAD AREA * | WASHERS † | | | | NUTS # | | | TYPICAL THREAD LENGTHS ‡ | | THREAD PITCH |
|------|--------------------|-----------|----|---|--------|--------|----|--------|--------------------------|---------|--------------|
| | (mm ²) | OD | ID | t | WEIGHT | AF | T | WEIGHT | L ≤ 125 | L > 125 | |
| M16 | 157 | 30 | 18 | 3 | 0.01 | 24 | 13 | 0.04 | 38 | 44 | 2.0 |
| M20 | 245 | 37 | 22 | 3 | 0.02 | 30 | 16 | 0.07 | 46 | 52 | 2.5 |
| M24 | 353 | 44 | 26 | 4 | 0.03 | 36 | 19 | 0.12 | 54 | 60 | 3.0 |
| M27 | 459 | 52 | 29 | 4 | 0.05 | 41 | 22 | 0.23 | 60 | 66 | 3.0 |
| M30 | 561 | 56 | 33 | 4 | 0.06 | 46 | 24 | 0.24 | 66 | 72 | 3.5 |
| M36 | 817 | 66 | 39 | 5 | 0.09 | 55 | 29 | 0.40 | 78 | 84 | 4.0 |
| M42 | 1120 | 78 | 45 | 7 | 0.18 | 65 | 34 | 0.63 | 90 | 96 | 4.5 |
| M48 | 1470 | 92 | 52 | 8 | 0.28 | 75 | 38 | 0.90 | 102 | 108 | 5.0 |
| M56 | 2030 | 105 | 62 | 9 | 0.40 | 85 | 45 | 1.43 | 118 | 124 | 5.5 |
| M64 | 2680 | 115 | 70 | 9 | 0.45 | 95 | 51 | 2.09 | 134 | 140 | 6.0 |


* Standard bolts given according to DIN933.

[Units: mm, kg]

† Standard washers given according to DIN125. Larger OD washers available on request.

‡ Thread lengths may vary depending on standard. Other lengths available.

Standard nuts given according to DIN934.

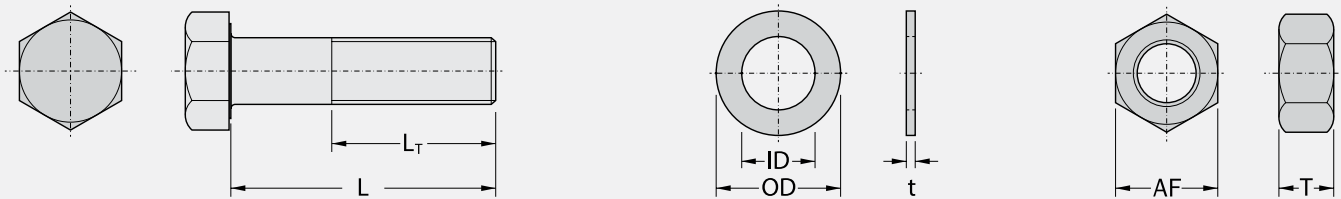

Grades

| | ISO 898 GALVANIZED | | ISO 356 STAINLESS STEEL * | |
|-------------------------|--------------------|-----|---------------------------|--------|
| Bolt grade | 4.6 | 8.8 | A-50 † | A-70 ‡ |
| Nut grade | 4 | 8 | A-50 † | A-70 ‡ |
| Tensile strength (MPa) | 400 | 800 | 500 | 700 |
| 0.2% yield stress (MPa) | 240 | 640 | 210 | 450 |

* Refer to Fender Application Design Manual for further details about PREN and galling.

† Size ≤ M39 unless agreed with manufacturer.

‡ Size ≤ M24 unless agreed with manufacturer.

Fenders must be properly fixed to operate correctly. Anchors are supplied to suit new or existing structures, in various strength ratings and with the choice of galvanized or various stainless steels.

DISCLAIMER


Trelleborg AB has made every effort to ensure that the technical specifications and product descriptions in this catalogue are correct.

The responsibility or liability for errors and omissions cannot be accepted for any reason whatsoever. Customers are advised to request a detailed specification and certified drawing prior to construction and manufacture. In the interests of improving the quality and performance of our products and systems, we reserve the right to make specification changes without prior notice. All dimensions, material properties and performance values quoted are subject to normal production and testing tolerances. This catalogue supersedes the information provided in all previous editions. If in doubt, please check with Trelleborg Marine Systems.

© Trelleborg AB, PO Box 153, 231 22 Trelleborg, Sweden.

This catalogue is the copyright of Trelleborg AB and may not be reproduced, copied or distributed to third parties without the prior consent of Trelleborg AB in each case.



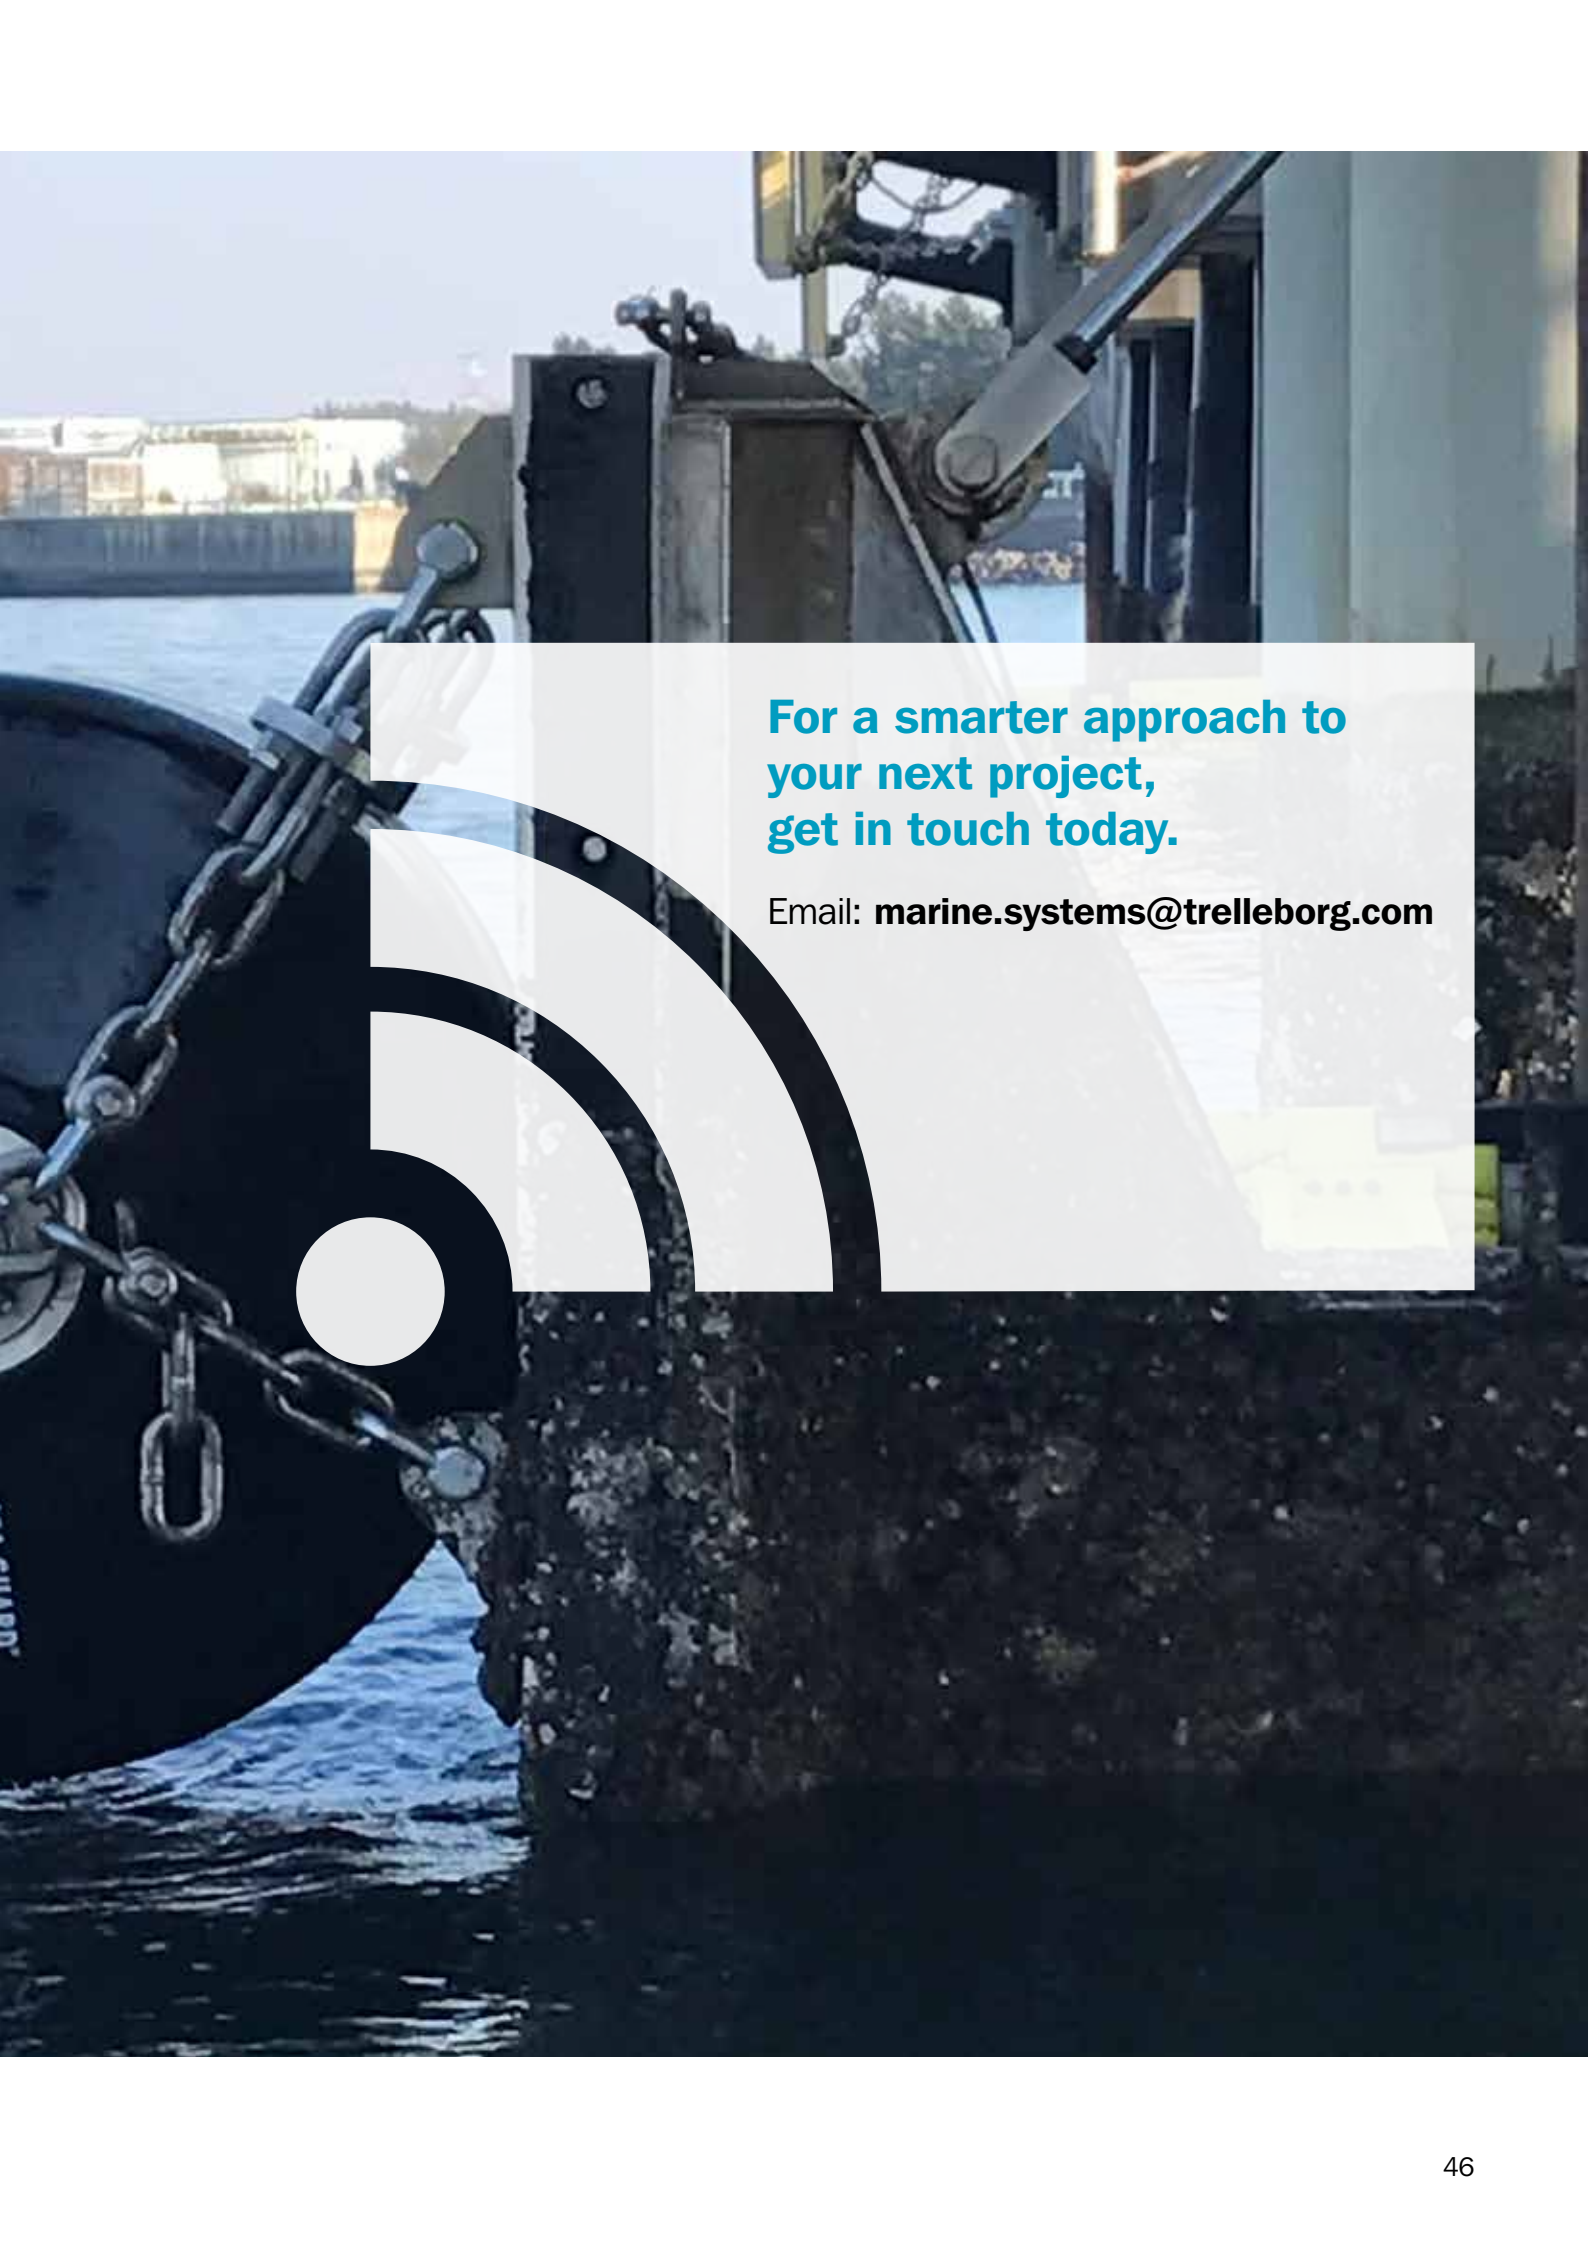

**For a smarter approach to
your next project,
get in touch today.**

Email: marine.systems@trelleborg.com



Trelleborg is a world leader in engineered polymer solutions that seal, damp and protect critical applications in demanding environments. Its innovative solutions accelerate performance for customers in a sustainable way.

WWW.TRELLEBORG.COM/MARINE

Fender Systems | Docking & Mooring | Ship-Shore Links | Ship Performance Monitoring | Navigation & Piloting



twitter: [@MarineInsights](https://twitter.com/MarineInsights)
youtube.com/user/TrelleborgMarine
flickr.com/photos/MarineInsights
linkedin.com/MarineInsights
MarineInsightsBlog.Trelleborg.com